arXiv:1301.3676v1 [math.OC] 16 Jan 2013

Duality and Network Theory in Passivity-based Cooperative Control

Mathias Bürger, Daniel Zelazo, and Frank Allgöwer

Abstract

We established in this paper an explicit connection between passivity-based cooperative control problems and the classical network optimization framework. A main contribution of this work is to reveal that duality relations known in network theory translate directly to the cooperative control setting. We study a general cooperative control problem involving passive dynamical systems and show that the asymptotic configuration is optimal with respect to a pair of dual optimization problems, an *optimal potential* and an *optimal flow* problem, defined by the equilibrium input-to-output maps of the dynamical systems and the nonlinear coupling functions, respectively. This connection provides a powerful methodology to analyze more complex problems. We then proceed to study a cooperative control problem with saturated coupling functions that exhibits partial output agreement, or *clustering*, in its asymptotic behavior. This clustering phenomenon is then interpreted and analyzed in the context of the network optimization framework. The novel connection between cooperative control and network optimization provides a unifying framework for network analysis and feedback design. We illustrate the potential of the results on a traffic dynamics model.

Index Terms

Network theory; passivity; cooperative control; convex optimization; duality.

I. INTRODUCTION

One of the most profound concepts in mathematics is the notion of *duality*. In many ways, duality theory is the mathematical answer to the idiom "there are two sides to every coin." This powerful concept manifests itself across many mathematical disciplines, but perhaps the most elegant and complete notion of duality is the celebrated *Lagrange duality* in convex optimization theory [1]. Every optimization problem admits a dual problem, which provides (under some constraint qualification) the optimal value of the original problem, referred to as the primal problem. In addition to its analytic elegance, duality has a significant practical relevance, as it has led to efficient numerical algorithms and insightful interpretations, both geometric and economic.

One of the most complete expositions on duality theory relate to a class of optimization problems over networks, generally known as *network optimization* [2]. Network optimization is a sub-discipline of optimization theory that integrates aspects of convex and combinatorial optimization theory [2], [3]. Most works in this area take an algorithmic perspective and aim to provide efficient computational methods [3]. However, in [2], a unifying network theory, based on convex optimization and duality was established. The key element of this framework built upon a pair of dual optimization problems: the *optimal network flow problem* and the *optimal potential problem*. In optimal flow problems, *flows* are assigned optimally to the edges of a network, while in optimal potential problems, *potentials* on the nodes and tensions along the edges are selected in an optimal manner.

The notion of duality also has a long history within the theory of control systems. Often control problems can be formulated as optimization problems and their respective duals have again a controls interpretation, see e.g. [4]. A natural and intuitive notion of duality in control system relates to the concepts of *control*

The authors thank the German Research Foundation (DFG) for financial support within the Cluster of Excellence in Simulation Technology (EXC 310/1) at the University of Stuttgart. Mathias Bürger and Frank Allgöwer are with the Institute for Systems Theory and Automatic Control, University of Stuttgart, Pfaffenwaldring 9, 70550 Stuttgart, Germany, {`mathias.buerger`, `frank.allgower`}`@ist.uni-stuttgart.de`. Daniel Zelazo is with the Faculty of Aerospace Engineering, Technion - Israel Institute of Technology, Haifa 32000, Israel, `dzelazo@technion.ac.il`.

and *estimation*, realized through system inputs and outputs. It comes as no surprise that much of the duality theory found in controls is a result of the intimate role optimization plays for both the design and analysis of these systems.

A recent trend in modern control theory is the study of cooperative control problems amongst groups of dynamical systems that interact over an information exchange network. A fundamental goal for the analysis of these systems is to reveal the interplay between properties of the individual dynamic agents, the underlying network topology, and the interaction protocols that influence the functionality of the overall system [5], [6]. Amongst the numerous control theoretic approaches being pursued to define a general theory for networks of dynamical systems, *passivity* [7] takes an outstanding role; see e.g., [8]. In [9], a passivity based framework for group coordination problems was established. Passivity was used in [10] to derive performance bounds on the input/output behavior of consensus-type networks. Passivity is also widely used in coordinated control of robotic systems [11] and the teleoperation of UAV swarms [12]. Passivity-based cooperative control with quantized measurements is studied in [13]. The refined concept of incremental passivity provides a framework to study various synchronization problems [14], [15]. Passivity was also used in the context of Port-Hamiltonian systems on graphs, to establish a unifying framework for a variety of networked dynamical system in [16]. In a previous work, we used a passivity-like framework to study *clustering* in networks of heterogeneous scalar dynamical systems with saturated couplings [17], [18], [19].

The passivity-based cooperative control framework has many modeling similarities to the network optimization framework. Indeed, both classes of problems depend fundamentally on an underlying network. A natural question, therefore, is the following: *Does the cooperative control framework inherit any of the duality results found in network optimization*? This question forms the main thesis of this work, and in fact leads to a novel and deep notion of duality for networked dynamic systems and an analytic bridge between cooperative control problems and network optimization theory.

In this work, we build on the results of passivity-based cooperative control and establish a connection to the general network optimization theory of [2].

The control theoretic framework that will allow us to establish this connection is the concept of *equilibrium independent passivity* (EIP) [20], [21]. Equilibrium independent passivity generalizes the classical passivity concept for dynamical systems that admit different equilibria for different constant input signals. We consider here a general cooperative control framework where the nodes of the network are each EIP systems. As a first contribution, we show that constraints on the control inputs, imposed by the network structure of the cooperative control problem, leads to a connection between the control problem and the dual pair of optimization problems, i.e., the optimal flow and the optimal potential problem. Thus, we provide an interpretation of the inputs and outputs as a pair of dual variables, namely as divergences and potentials, respectively. Next, we consider a class of dynamic feedback control laws, based upon an internal model approach [22], that achieve output agreement. We show that the outputs and the states of the controller can also be interpreted as dual variables, namely as flows and tensions, from a dual pair of network optimization problems. These results provide us with a complete interpretation of the dynamic variables in a network theoretic sense. We show that the duality relation between the different variables, and in particular the *conversion formula* relating these variables, leads directly to a Lyapunov function for the closed-loop systems.

The duality relationships and the network theoretic interpretation provide a powerful framework to consider more complex structures and set-ups. One important connection established here is between network flow problems with capacity constraints and dynamical networks with bounded coupling functions, exhibiting clustering (or partial output agreement) behavior. The network theoretic interpretation provides tools to predict the clustering behavior. We illustrate the applicability and relevance of our results on an example problem. We discuss how a traffic dynamics model can be understood within our framework and use the proposed optimization methods to analyze its behavior.

The reminder of the paper is organized as follows. We introduce the general network theory, following the presentation given in [2], in Section II. Next, we prepare the control problem by reviewing equilibrium independent passivity in Section III. The connection between cooperative control and network theory is established in Section IV. We first discuss the implications of the structural control constraints on the asymptotic behavior of the dynamic system. Next, we present and analyze an internal model based control law and provide a Lyapunov-based stability analysis. Finally, we highlight the connection between constrained network flow problems and cooperative control problems with saturated couplings in Section V. The example problem is studied in Section VI before some concluding remarks are given in Section VII.

Notation: Monotone and Convex Functions

We briefly recall some notions of monotonicity and convexity. A function $\phi : \mathbb{R}^n \mapsto \mathbb{R}^n$ is said to be *strongly monotone* on $\mathcal{D}$ if there exists $\alpha > 0$ such that $(\phi(\eta) - \phi(\xi))^\top(\eta - \xi) \geq \alpha\|\eta - \xi\|^2$ for all $\eta, \xi \in \mathcal{D}$, and γ*-co-coercive* on $\mathcal{D}$ if there exists $\gamma > 0$ such that

$$(\phi(\eta) - \phi(\xi))^\top(\eta - \xi) \geq \gamma\|\phi(\eta) - \phi(\xi)\|^2$$

for all $\eta, \xi \in \mathcal{D}$, see, e.g., [23]. A function $\Phi : \mathbb{R}^q \mapsto \mathbb{R}$ is said to be *convex* on a convex set $\mathcal{D}$ if for any two points $\eta, \xi \in \mathcal{D}$ and for all $\lambda \in [0, 1]$, $\Phi(\lambda\eta + (1 - \lambda)\xi) \leq \lambda\Phi(\eta) + (1 - \lambda)\Phi(\xi)$. It is said to be *strictly convex* if the inequality holds strictly and *strongly convex* on $\mathcal{D}$ if there exists $\alpha > 0$ such that for any two points $\eta, \xi \in \mathcal{D}$, with $\eta \neq \xi$, and for all $\lambda \in [0, 1]$

$$\Phi(\lambda\eta + (1 - \lambda)\xi) < \lambda\Phi(\eta) + (1 - \lambda)\Phi(\xi) - \frac{1}{2}\lambda(1 - \lambda)\alpha\|\eta - \xi\|^2.$$

The *integral* of a function $\phi : \mathcal{D} \mapsto \mathbb{R}$ at the point $\eta \in \mathcal{D}$ is defined as $\Phi(\eta) = \int_{\bar{\eta}}^{\eta} \phi(s)ds + c$, for a fixed $\bar{\eta} \in \mathcal{D}$ and a constant $c \in \mathbb{R}$. If ϕ is monotone, its integral Φ is convex. Similarly, if ϕ is strongly monotone, its integral Φ is strongly convex.

The *convex conjugate* of a convex function $\Phi(\eta)$, denoted $\Phi^\star$, is defined as [24]

$$\Phi^\star(\xi) = \sup_{\eta\in\mathcal{D}}\{\eta^\top\xi - \Phi(\eta)\} = -\inf_{\eta\in\mathcal{D}}\{\Phi(\eta) - \eta^\top\xi\}.$$

Let ϕ be an invertible monotone function and let Φ and $\Phi^\star$ be its integral and the corresponding convex conjugate, then $\nabla\Phi^\star(\xi) = \phi^{-1}(\xi)$;[1] see e.g., [24].

A special convex function we will frequently use is the *indicator function*. Let $\mathbb{C}$ be a closed, convex set, the indicator function is defined as

$$I_{\mathbb{C}}(\eta) = \begin{cases} 0 & \text{if } \eta \in \mathbb{C} \\ +\infty & \text{if } \eta \notin \mathbb{C}. \end{cases}$$

We will also use the indicator function for points, e.g., $I_0(\eta)$ as the indicator function for $\eta = 0$.

II. NETWORK THEORY

The objective of this paper is to study passivity-based cooperative control in the context of *network theory* [2]. A *network* is described by a *graph* $\mathcal{G} = (\mathbf{V}, \mathbf{E})$, consisting of a finite set of *nodes*, $\mathbf{V} = \{v_1, \ldots, v_{|\mathbf{V}|}\}$, and a finite set of *edges*, $\mathbf{E} = \{e_1, \ldots, e_{|\mathbf{E}|}\}$, describing the incidence relation between pairs of nodes. Although we consider $\mathcal{G}$ in the cooperative control problem as an *undirected graph*, we assign to each edge an arbitrary orientation. The notation $e_k = (v_i, v_j) \in \mathbf{E} \subset \mathbf{V} \times \mathbf{V}$ indicates that v_i is the initial node of edge e_k and v_j is the terminal node. We will abbreviate this notation simply with $k = (i, j)$, and write $k \in \mathbf{E}$ and $i, j \in \mathbf{V}$.

The *incidence matrix* $E \in \mathbb{R}^{|\mathbf{V}|\times|\mathbf{E}|}$ of the graph $\mathcal{G}$ with arbitrary orientation, is a $\{0, \pm1\}$ matrix with the rows and columns indexed by the nodes and edges of $\mathcal{G}$ such that $[E]_{ik}$ has value '+1' if node i is the initial node of edge k, '-1' if it is the terminal node, and '0' otherwise. This definition implies that for any graph, $\mathbb{1}^\top E = 0$, where $\mathbb{1} \in \mathbb{R}^{|\mathbf{V}|}$ is the vector of all ones. We refer sometimes to the *flow space* of $\mathcal{G}$ as the null space $\mathcal{N}(E^\top)$, and the *cut space* of $\mathcal{G}$ as the range space $\mathcal{R}(E)$; see [25]. Additionally, $\mathcal{N}(E)$ is named the *circulation space* of $\mathcal{G}$, and $\mathcal{R}(E^\top)$ the *differential space*. Note that by the fundamental theorem of linear algebra, the flow space is orthogonal to the cut space, i.e., $\mathcal{N}(E^\top) \perp \mathcal{R}(E)$, and the circulation space is orthogonal to the differential space, i.e., $\mathcal{N}(E) \perp \mathcal{R}(E^\top)$ [26].

---

[1] This correspondence can be generalized to all monotonic functions. The exact statement can be found in [24, Cor. 23.5.1]: If Φ is a proper convex function, then $\eta \in \partial\Phi^\star(\xi)$ if and only if $\xi \in \partial\Phi(\eta)$, where $\partial\Phi(\eta)$ denotes the set of subgradients of Φ at the point η.

The special structure of the incidence matrix makes it an appealing operator to model many physical processes including transportation networks and passive electrical circuit theory. This has led to an adoption of the vocabulary for these systems into the description of network optimization problems [2], and we rely on this language as well. We call a vector $\mu = [\mu_1, \ldots, \mu_{|\mathbf{E}|}]^\top \in \mathbb{R}^{|\mathbf{E}|}$ a *flow* of the network $\mathcal{G}$. An element of this vector, μ_k, is the *flux* of the edge $k \in \mathbf{E}$. An intuitive interpretation for the flux of edge k relates to transportation networks where it represents the amount of material transported across that edge. The incidence matrix can be used to describe a type of conservation relationship between the flow of the network along the edges and the net in-flow (or out-flow) at each node in the network, termed the *divergence* of the network $\mathcal{G}$. The relationship states that the net flux entering a node must be equal to the net flux leaving the node. The divergence associated with the flow μ is denoted by the vector $\mathbf{u} = [\mathrm{u}_1, \ldots, \mathrm{u}_{|\mathbf{V}|}]^\top \in \mathbb{R}^{|\mathbf{V}|}$ and can be represented as[2]

$$\mathbf{u} + E\mu = 0. \tag{1}$$

Borrowing from electrical circuit theory, we call the vector $\mathbf{y} \in \mathbb{R}^{|\mathbf{V}|}$ a *potential* of the network $\mathcal{G}$. An element of this vector, y_i, is called the potential at node i. For any edge $k = (i, j)$, one can associate the *potential difference* across the edge as $\zeta_k = \mathrm{y}_j - \mathrm{y}_i$; we also call this the *tension* of the edge k.[3] The *tension vector* of the network $\mathcal{G}$, $\zeta = [\zeta_1, \ldots, \zeta_{|\mathbf{E}|}]^\top$, can be expressed as[4]

$$\zeta = E^\top \mathbf{y}. \tag{2}$$

Flows and tensions are thus related to potentials and divergences by the *conversion formula*

$$\mu^\top \zeta = -\mathbf{y}^\top \mathbf{u}. \tag{3}$$

Network theory broadly connects elements of graph theory to a family of convex optimization problems. The beauty of this theory is that it admits elegant and simple duality relations, as it relates a dual pair of optimization problems: the *optimal flow problem* and the *optimal potential problem*.

The first problem attempts to optimize the flow and divergence in a network subject to the conservation constraint (1). Each edge is assigned a *flux cost*, $C_k^{flux}(\mu_k)$, and each node is assigned a *divergence cost* $C_i^{div}(\mathrm{u}_i)$. The optimal flow problem is then

$$\begin{aligned} \min_{\mathbf{u},\mu} \quad & \sum_{i=1}^{|\mathbf{V}|} C_i^{div}(\mathrm{u}_i) + \sum_{k=1}^{|\mathbf{E}|} C_k^{flux}(\mu_k) \\ \text{s.t.} \quad & \mathbf{u} + E\mu = 0. \end{aligned} \tag{4}$$

The optimization problem (4) admits a dual problem with a very characteristic structure. To form the dual problem, one can replace the divergence u_i and flow μ_k variables in the objective functions with artificial variables $\tilde{\mathrm{u}}_i$ and $\tilde{\mu}_k$, respectively, and introduce the artificial constraints $\mathrm{u}_i = \tilde{\mathrm{u}}_i$, $\mu_k = \tilde{\mu}_k$. These artificial constraints can be dualized with Lagrange multipliers y_i and ζ_k, respectively. The objective functions of the dual problem turn out to be the convex conjugates of the original cost functions, i.e.,

$$C_i^{pot}(\mathrm{y}_i) := C_i^{div,\star}(\mathrm{y}) = -\inf_{\tilde{\mathrm{u}}_i}\{C_i^{div}(\tilde{\mathrm{u}}_i) - \mathrm{y}_i\tilde{\mathrm{u}}_i\}$$

---

[2] This condition is *Kirchhoff's Current Law*.

[3] In this case, the nodes can be thought to represent a *force*.

[4] This condition is *Kirchoff's Voltage Law*

and

$$C_k^{ten}(\zeta_i) := C_k^{flux,\star}(\zeta) = -\inf_{\tilde{\mu}_k}\{C_k^{flux}(\tilde{\mu}_k) - \zeta_k\tilde{\mu}_k\}.$$

As in the dual, the linear constraint of the form $\boldsymbol{\zeta} = E^\top \mathbf{y}$ must hold, where $\mathbf{y} = [\mathrm{y}_1, \ldots, \mathrm{y}_{|\mathbf{V}|}]^\top$ and $\boldsymbol{\zeta} = [\zeta_1, \ldots, \zeta_{|\mathbf{E}|}]^\top$; it follows that y_i are node *potentials* and ζ_k are the edge *tensions*. The dual problem to (4) is now called the *optimal potential problem*

$$\begin{aligned} \min_{\mathbf{y},\boldsymbol{\zeta}} \quad & \sum_{i=1}^{|\mathbf{V}|} C_i^{pot}(\mathrm{y}_i) + \sum_{k=1}^{|\mathbf{E}|} C_k^{ten}(\zeta_k), \\ \text{s.t.} \quad & \boldsymbol{\zeta} = E^\top \mathbf{y}. \end{aligned} \tag{5}$$

We provide in the sequel an interpretation of a cooperative control problem for a certain class of passive dynamical systems in the context of the network theory and present several duality relations.

III. EQUILIBRIUM INDEPENDENT PASSIVITY

The main objective of this paper is to connect a cooperative control problem for a class of passive system to the general network theory introduced in Section II. The right systems theoretic framework to establish such a connection turns out to be *equilibrium-independent passivity* (EIP), as recently introduced by Hines et. al. [20]. Equilibrium independent passivity specializes the classical passivity concept to systems whose equilibrium point depends on an external signal. This framework can be traced back to earlier works including [21]. We review the concept of EIP and some results from [20], but restrict the discussion here to SISO systems.

Consider a nonlinear dynamical control system of the form

$$\dot{x}(t) = f(x(t), u(t)), \quad y(t) = h(x(t), u(t)), \tag{6}$$

with state vector $x(t) \in \mathcal{X} \subseteq \mathbb{R}^p$, and $u(t) \in \mathcal{U} \subseteq \mathbb{R}$, $y(t) \in \mathcal{Y} \subseteq \mathbb{R}$. The system (6) is said to have an *equilibrium input-to-state characteristic* if there is a set $\bar{\mathcal{U}} \subseteq \mathcal{U}$ such that for every $\mathrm{u} \in \bar{\mathcal{U}}$ there is a unique $\mathrm{x} \in \mathcal{X}$ satisfying $f(\mathrm{x}, \mathrm{u}) = 0$. The *equilibrium input-to-state map* $k_{\mathrm{x}} : \bar{\mathcal{U}} \mapsto \bar{\mathcal{X}} \subseteq \mathcal{X}$ is defined accordingly by $f(k_{\mathrm{x}}(\mathrm{u}), \mathrm{u}) = 0$. We assume throughout the paper that k_{x} is continuous on $\bar{\mathcal{U}}$. The corresponding *equilibrium input-to-output map* is defined as $k_{\mathrm{y}} : \bar{\mathcal{U}} \mapsto \bar{\mathcal{Y}} \subset \mathcal{Y}$ with $k_{\mathrm{y}} := h(k_{\mathrm{x}}(\mathrm{u}), \mathrm{u})$. As a notational convention, we will use italic letters for dynamic variables, e.g., $x(t)$, and letters in normal font for constant signals, such as, e.g., x.

Definition 3.1 ([20]): The system (6) is *equilibrium independent passive* (EIP) on $\bar{\mathcal{U}}$ if for every $\mathrm{u} \in \bar{\mathcal{U}}$ there exists a once differentiable and positive definite storage function $S_{\mathrm{u}} : \mathcal{X} \mapsto \mathbb{R}$ such that $S_{\mathrm{u}}(\mathrm{x}) = S_{\mathrm{u}}(k_{\mathrm{x}}(\mathrm{u})) = 0$ and

$$\dot{S}_{\mathrm{u}}(x(t), u(t)) = \nabla S_{\mathrm{u}}^\top(x(t)) f(x(t), u(t)) \leq (u(t) - \mathrm{u})(y(t) - \mathrm{y}) \tag{7}$$

where $\mathrm{x} = k_{\mathrm{x}}(\mathrm{u})$ and $\mathrm{y} = k_{\mathrm{y}}(\mathrm{u})$.[5]

Note that $S_{\mathrm{u}}(x(t))$ is defined for a given equilibrium input $\mathrm{u} \in \bar{\mathcal{U}}$, and it is required that there exists a storage function $S_{\mathrm{u}}(x(t))$ for all $\mathrm{u} \in \bar{\mathcal{U}}$. We will not distinguish the storage functions defined for different constant input signals in the following and simply write $S(x)$.

Definition 3.2 ([20]): The system (6) is *output strictly equilibrium independent passive* (OSEIP) if

$$\dot{S}(x(t), u(t)) \leq (u(t) - \mathrm{u})(y(t) - \mathrm{y}) - \rho(y(t) - \mathrm{y}) \tag{8}$$

for some positive definite function $\rho(\cdot)$.

It was shown in [20] that the equilibrium input-output map of an OSEIP system is co-coercive. We provide the result here from a slightly different perspective, involving the inverse of the input-to-output map; it follows from an observation about co-coercive functions given in [23].

---

[5] Throughout the paper the gradient of a function is defined as a column vector $\nabla S = (\frac{\partial S}{\partial x})^\top$.

Lemma 3.3 (Strong Monotonicity): If (6) is OSEIP with $\rho(y(t)-\mathrm{y}) = \gamma\|y(t)-\mathrm{y}\|^2$ and $k_{\mathrm{y}}(\mathrm{u})$ is invertible on $\bar{\mathcal{U}}$, then the inverse $k_{\mathrm{y}}^{-1}(\mathrm{y})$ is strongly monotone on $\bar{\mathcal{Y}}$.

Proof: The dissipation inequality (8) with $\rho(y(t)-\mathrm{y}) = \gamma\|y(t)-\mathrm{y}\|^2$ must hold for any trajectory and in particular for any other equilibrium trajectory $u(t) = \mathrm{u}'$ (with $y(t) = \mathrm{y}', x(t) = \mathrm{x}'$ defined accordingly), giving $\nabla S^\top(\mathrm{x}')f(\mathrm{x}',\mathrm{u}') \leq -\gamma\|\mathrm{y}'-\mathrm{y}\|^2 + (\mathrm{y}'-\mathrm{y})(\mathrm{u}'-\mathrm{u})$. Using $f(\mathrm{x}',\mathrm{u}') = 0$ and replacing $\mathrm{u}' = k_{\mathrm{y}}^{-1}(\mathrm{y}')$ ($\mathrm{u} = k_{\mathrm{y}}^{-1}(\mathrm{y})$) we obtain the strong monotonicity condition $\gamma\|\mathrm{y}'-\mathrm{y}\|^2 \leq (\mathrm{y}'-\mathrm{y})(k_{\mathrm{y}}^{-1}(\mathrm{y}') - k_{\mathrm{y}}^{-1}(\mathrm{y}))$. ■

EIP is clearly a stronger requirement than classical passivity. However, it can be established for various important problem classes. As discussed in [20], any *incrementally passive* system (see, e.g., [14], [27]) is also equilibrium independent passive. The converse, however, is not necessarily true. In [21], conditions for EIP of nonlinear systems with constant input vector fields are presented.

In this work we are interested in systems with “global” input-to-output maps, having $\bar{\mathcal{U}} = \mathbb{R}$ and $\bar{\mathcal{Y}} = \mathbb{R}$. We point out two important system classes that admit globally defined equilibrium input-to-output maps and are OSEIP. We are particularly interested in systems with $k_{\mathrm{y}}(0) \neq 0$, which motivates the following examples.

Example 3.4 (Affine Systems): Consider the affine system of the form

$$\begin{aligned}\dot{x}(t) &= Ax(t) + Bu(t) + \mathrm{w}\\ y(t) &= Cx(t) + Du(t) + \mathrm{v}\end{aligned}$$

with (A,B) controllable and (A,C) observable. The system is OSEIP if (A,B,C,D) satisfy the matrix equations of the KYP-lemma [28], (i.e., the system is strictly output passive in the classical sense) and A is invertible [20]. In addition, with $\mathrm{w} \in \mathbb{R}^p$ and $\mathrm{v} \in \mathbb{R}$ being constant signals the equilibrium input-output map is the affine function

$$k_y(\mathrm{u}) = \big(-CA^{-1}B + D\big)\,\mathrm{u} + \big(-CA^{-1}\mathrm{w} + \mathrm{v}\big)\,, \tag{9}$$

i.e., the *dc-gain* of the linear system plus the constant value determined by the exogenous inputs.

Example 3.5 (Scalar Systems): Consider the scalar nonlinear system

$$\dot{x}(t) = -f(x(t)) + u(t),\ y(t) = x(t), \tag{10}$$

with $x(t) \in \mathbb{R}, u(t) \in \mathbb{R}, y(t) \in \mathbb{R}$. The system is OSEIP if (10) satisfies the QUAD condition, see [29], i.e., for all $x'(t)$ and $x''(t)$ it holds that

$$(x'(t) - x''(t))\big(f(x'(t)) - f(x''(t))\big) \geq \gamma(x'(t) - x''(t))^2.$$

Systems of this form are considered in the context of synchronization [15], [29], [30]. Note that the QUAD condition reduces for the scalar system (10) to a strong monotonicity condition on $f(x(t))$. The dynamics can then be understood as the gradient of a strongly convex function, i.e., $f(x(t)) = \nabla F(x(t))$. This corresponds to the system class studied in [17], [18], [31]. The equilibrium input-output map is then the strongly monotone function $k_{\mathrm{y}}(\mathrm{u}) = f^{-1}(\mathrm{u})$.

IV. OUTPUT-AGREEMENT AND NETWORK THEORY

We turn our attention now to a multi-agent cooperative control problem. In this section, we will explore the *output agreement* problem for a team of agents that are each passive systems. We connect this dynamical control problem to the network theory framework of [2], and point out several duality relations between the involved variables.

We consider a network $\mathcal{G} = (\mathbf{V}, \mathbf{E})$ of dynamical systems, with each node of $\mathcal{G}$ representing an *output strictly equilibrium independent passive SISO system*

$$\Sigma_i: \qquad \dot{x}_i(t) = f_i(x_i(t), u_i(t)), \quad y_i(t) = h_i(x_i(t), u_i(t)), \qquad i \in \mathbf{V}. \tag{11}$$

The OSEIP property implies that for each $\mathrm{u}_i \in \bar{\mathcal{U}}_i$ a storage function exists. We assume, in order to avoid misleading technical discussions, that the storage functions $S_i(x_i(t))$ are positive definite. We focus on networks comprised of heterogeneous systems, and in particular for networks where the uncoupled systems have inherently *different unforced equilibria*. Equivalently, each agent has a different equilibrium input-to-output map when there is no forcing term, i.e.,

$$k_{y,i}(0) \neq k_{y,j}(0) \text{ for all } i,j \in \mathbf{V}. \tag{12}$$

In the following we adopt the notation $\boldsymbol{y}(t) = [y_1(t),\dots,y_{|\mathbf{V}|}(t)]^\top$ and $\boldsymbol{u}(t) = [u_1(t),\dots,u_{|\mathbf{V}|}(t)]^\top$ for the stacked output and input vectors of the complete network. We use normal font letters $\mathbf{y},\mathbf{u}$ to indicate that a vector corresponds to equilibrium trajectories. Similarly, we use $\mathbf{k}_\mathrm{y}(\mathbf{u}) = [k_{\mathrm{y},1}(\mathrm{u}_1),\dots,k_{\mathrm{y},|\mathbf{V}|}(\mathrm{u}_{|\mathbf{V}|})]^\top$. If all $k_{\mathrm{y},i}$ are invertible, we write $\mathbf{k}_\mathrm{y}^{-1}(\mathbf{y}) = [k_{\mathrm{y},1}^{-1}(\mathrm{y}_1),\dots,k_{\mathrm{y},n}^{-1}(\mathrm{y}_{|\mathbf{V}|})]^\top$.

We want the systems to reach an agreement on a constant steady-state value of the outputs.

Definition 4.1: A network of dynamical systems (11) is said to reach *output agreement* if

$$\lim_{t\to\infty} \boldsymbol{y}(t) \to \beta\mathbb{1} \tag{13}$$

for some $\beta \in \mathbb{R}$, called the *agreement value*.

Output agreement should be achieved through a coupling of the network nodes using the control inputs. The cooperative control framework we consider is based on a canonical control structure, illustrated in Figure 1 [9]. The controllers Π_k are located between neighboring systems in the network and use the relative outputs of the systems i.e., $\boldsymbol{\zeta}(t) = E^\top \boldsymbol{y}(t)$, as their inputs. This immediately implies that the couplings between neighboring systems are *diffusive* couplings [22]. As we consider the underlying graph to be undirected, we focus on symmetric couplings, where the output of a controller influences the two incident systems with reversed signs. Following the network interpretation, the control input $\boldsymbol{u}(t)$ is generated by the mapping of the controller outputs, denoted by $\boldsymbol{\mu}(t)$, through the incidence matrix E to the nodes of the system. This structure has evolved as a standard control structure in passivity-based cooperative control, see e.g. [8], [9], [16], and is the basis for our work here. Later, we will specify our particular choice of the controllers Π_k.

We now make the following observation resulting from the network structure of the control system. The control input $\boldsymbol{u}(t)$ is always in the cut-space of $\mathcal{G}$, that is

$$\boldsymbol{u}(t) \in \mathcal{R}(E). \tag{14}$$

This structural condition is independent of the exact controller we choose, but is purely a consequence of the networked structure of Figure 1. A direct consequence of this structural condition is that the control inputs summed over all nodes in the network will vanish, i.e., $\mathbb{1}^\top \boldsymbol{u}(t) = 0$. Before we propose a feedback control law for output agreement, we first investigate the role of the structural constraint $\boldsymbol{u}(t) \in \mathcal{R}(E)$ in the agreement problem. This also motivates the general organization of this section, whereby we first consider the network implications for output agreement at the *plant level*, and then perform a similar analysis at the *control level*, and conclude by analyzing the complete closed-loop system.

A. The Plant Level

Without specifying a control law, we first investigate the output agreement problem considering only the plant dynamics (11) and the structural constraint on the input (14). This discussion will already provide us the first duality relation in passivity-based cooperative control.

We note directly that the dynamical network (11) has an agreement steady-state $\mathbf{y} = \beta\mathbb{1}$ if and only if there exists an equilibrium control input $\mathbf{u} \in \mathcal{R}(E)$ such that $\mathbf{k}_\mathrm{y}(\mathbf{u}) \in \mathrm{span}\{\mathbb{1}\}$. The algebraic constraint $\mathbf{u} \in \mathcal{R}(E)$ contributes to the structure of the coupling controller, while the second condition ensures the existence of a steady-state output in agreement, since $\mathbf{y} = \mathbf{k}_\mathrm{y}(\mathbf{u})$. Note that $\mathrm{span}\{\mathbb{1}\} = \mathcal{N}(E^\top)$. A stronger, more insightful, characterization of the agreement steady-state can be established under some additional assumptions.

Assumption 4.2: All node dynamics (11) are OSEIP with $\bar{\mathcal{U}} = \mathbb{R}$ and $\bar{\mathcal{Y}} = \mathbb{R}$ and all equilibrium input-to-output maps $k_{\mathrm{y},i}(\mathrm{u}_i)$ of all systems (11) are invertible and strongly monotone.

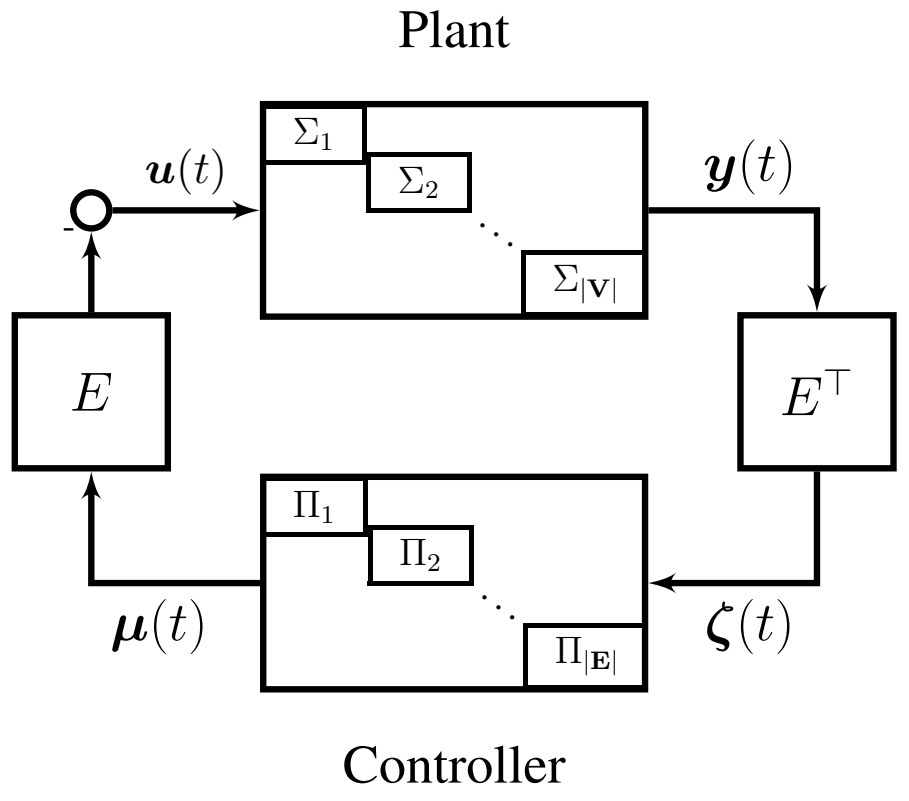

Fig. 1. Block-diagram of the canonical passivity-based cooperative control structure.

The affine systems of Example 3.4 and the gradient systems of Example 3.5 satisfy this assumption. Under this assumption the agreement steady-state can be precisely characterized.

Lemma 4.3: Let Assumption 4.2 hold. Then there is a unique agreement steady-state $\mathbf{y} = \beta\mathbb{1}$ and the agreement value β satisfies

$$\sum_{i=1}^{|\mathbf{V}|} k_{\mathrm{y},i}^{-1}(\beta) = 0.$$

Proof: The condition of a steady-state is $\mathbf{k}_{\mathrm{y}}(\mathbf{u}) = \beta\mathbb{1}$. Since, by assumption, all input-output characteristics are invertible, we have $\mathbf{u} = \mathbf{k}_{\mathrm{y}}^{-1}(\beta\mathbb{1})$. Since $\mathbf{u} \in \mathcal{R}(E)$, it must hold that $\mathbf{u}$ is orthogonal to $\mathcal{N}(E^\top)$. Since $\mathcal{N}(E^\top) = \mathrm{span}\{\mathbb{1}\}$, it follows that $\mathbb{1}^\top\mathbf{u} = \mathbb{1}^\top\mathbf{k}_{\mathrm{y}}^{-1}(\beta\mathbb{1}) = 0$. By assumption, the input-to-output maps are strongly monotone implying that there always exists exactly one β such that $\mathbb{1}^\top\mathbf{k}_{\mathrm{y}}^{-1}(\beta\mathbb{1}) = \sum_{i=1}^{|\mathbf{V}|} k_{\mathrm{y},i}^{-1}(\beta) = 0$. ■

This small observation leads us to a novel interpretation of the output agreement problem in the context of network theory studied in [2]. We define for each node the integral function of the equilibrium input-to-output map $k_{\mathrm{y},i}(\mathrm{u}_i)$, denoted $K_i(\mathrm{u}_i)$, and satisfying

$$\nabla_{\mathrm{u}_i} K_i(\mathrm{u}_i) = k_{\mathrm{y},i}(\mathrm{u}_i). \tag{15}$$

As $k_{\mathrm{y},i}$ is co-coercive, the integral function K_i is convex. We will call $K_i(\mathrm{u}_i)$ in the following the *cost function* of node i. The convex conjugate of the cost function $K_i(\mathrm{u}_i)$ is

$$K_i^\star(\mathrm{y}_i) = \sup_{\mathrm{u}_i} \{\mathrm{y}_i\mathrm{u}_i - K_i(\mathrm{u}_i)\}, \tag{16}$$

and is called the *potential function* of node i. Recall that $\nabla_{\mathrm{y}} K_i^\star(\mathrm{y}_i) = k_{\mathrm{y},i}^{-1}(\mathrm{y}_i)$.

We now connect the steady-state agreement output of the dynamical network with a distributed, symmetric feedback, i.e., $\boldsymbol{u}(t) \in \mathcal{R}(E)$, to the dual pair of network optimization problems.

Optimal Potential Problem: Consider the static *optimal potential problem* of the form

$$\begin{aligned} \min_{\mathrm{y}_i} \; & \sum_{i=1}^{|\mathbf{V}|} K_i^\star(\mathrm{y}_i), \\ \text{s.t.} \quad & E^\top\mathbf{y} = 0. \end{aligned} \tag{OPP1}$$

The objective functions of this problem are the convex conjugates of the integral functions of the equilibrium input-to-output maps. The constraint $E^\top\mathbf{y} = 0$ enforces a balancing of the potentials, i.e., $\mathrm{y}_1 = \cdots = \mathrm{y}_{|\mathbf{V}|}$. Note that the problem can be written in the standard form of an optimal potential problem (5), with $C_i^{pot}(\mathrm{y}_i) := K_i^\star(\mathrm{y}_i)$ and $C^{ten}(\boldsymbol{\zeta}_k)$ the indicator function $I_0(\boldsymbol{\zeta}_k)$ for the point zero. In fact, we now establish that the steady-state agreement output of the network of dynamical systems (11) corresponds to the optimal potentials computed with (OPP1).

Theorem 4.4: Let Assumptions 4.2 hold, and let $\mathbf{y} = \beta\mathbb{1}$ be the agreement state of the network (11). Then $\mathbf{y}$ is the optimal solution to (OPP1).

Proof: Under the stated assumptions, Lemma 4.3 shows that an agreement steady-state exists with $\mathbf{y} = \beta\mathbb{1}$ and that the agreement value β satisfies $\sum_{i=1}^{|\mathbf{V}|} k_{\mathrm{y},i}^{-1}(\beta) = 0$. In particular, we have

$$\sum_{i=1}^{|\mathbf{V}|} \nabla K_i^{\star}(\beta) = \sum_{i=1}^{|\mathbf{V}|} k_{\mathrm{y},i}^{-1}(\beta) = 0.$$

This is the first-order optimality condition of (OPP1) after replacing the constraint $E^{\top}\mathbf{y} = 0$ with the equivalent condition $\mathbf{y} = \beta\mathbb{1}$. Therefore, $\mathbf{y} = \beta\mathbb{1}$ is an optimal solution to (OPP1). ■

This observation leads directly to an interpretation of the systems outputs $\boldsymbol{y}(t)$ as *potentials* in a network theoretic sense. Somehow surprising, the steady-state control input generating this agreement output is directly related to the dual problem of (OPP1).

Optimal Flow Problem: The dual problem to (OPP1) can be derived in the standard way as outlined in Section II. One obtains the dual cost functions as the convex conjugates of the original cost functions, i.e., $K_i^{\star\star} := K_i$ and $I_0^{\star} = 0$, leading directly to the *optimal flow problem*

$$\begin{aligned} \min_{\mathbf{u},\mu} \quad & \sum_{i=1}^{|\mathbf{V}|} K_i(\mathrm{u}_i) \\ \text{s.t.} \quad & \mathbf{u} + E\mu = 0, \end{aligned} \tag{OFP1}$$

with divergence variables $\mathbf{u} \in \mathbb{R}^{|\mathbf{V}|}$ and flow variables $\mu \in \mathbb{R}^{|\mathbf{E}|}$. This is precisely an optimal flow problem of the structure given in (4). Please note that $\mathbf{u}$ refers at this point only to the divergence variable of the network optimization problem. However, as suggested by the notation, we will connect the divergence variable to the control inputs. A first observation in this direction is that the equality constraint $\mathbf{u}+E\mu = 0$ incorporates directly the structural condition $\mathbf{u} \in \mathcal{R}(E)$. In fact, the solution to (OFP1) is exactly the steady-state input required for output agreement.

Theorem 4.5: Let Assumptions 4.2 hold and let $\mathbf{y} = \beta\mathbb{1}$ be the agreement state of the network (11). Then the $\mathbf{u}$ satisfying $\mathbf{k}_{\mathrm{y}}(\mathbf{u}) = \mathbf{y}$ is an optimal solution to (OFP1).

Proof: Consider the Karush-Kuhn-Tucker conditions of optimality of (OFP1) [1], with $\mathbf{y}$ being the Lagrange multiplier to the equality constraint, i.e., $\nabla K_i(\mathbf{u}) - \mathbf{y} = 0$, $\mathbf{y}^{\top}E = 0$, and $\mathbf{u} + E\mu = 0$. The first condition is equivalent $\mathbf{k}_{\mathrm{y}}(\mathbf{u}) = \mathbf{y}$ and the second condition implies $\mathbf{y} = \alpha\mathbb{1}$. Thus, combining the second and the third condition, we obtain $\mathbf{y}^{\top}\mathbf{u} = 0$, i.e., $\alpha\sum_{i=1}^{|\mathbf{V}|} \mathrm{u}_i = 0$. This is equivalent to $\sum_{i=1}^{|\mathbf{V}|} k_{\mathrm{y},i}^{-1}(\mathrm{y}_i) = 0$. Thus, the Lagrange multiplier $\mathbf{y}$ is the agreement steady state output. Additionally, the corresponding steady-state input $\mathbf{u}$ satisfies the KKT condition $\mathbf{k}_{\mathrm{y}}(\mathbf{u}) = \mathbf{y}$, and is therefore an optimal solution to (OFP1). ■

Thus, we can interpret the input of the dynamical network $\boldsymbol{u}(t)$ as a *divergence* in the network theoretic sense. Additionally, we have established an interpretation of the outputs $\boldsymbol{y}(t)$ as *potential* variables. As the divergence and potential variables are a pair of primal/dual variables, this observation provides us with a first duality relation between the inputs $\boldsymbol{u}(t)$ and the outputs $\boldsymbol{y}(t)$ of the dynamical network (11). In this context, we find that this duality is actually precisely explained via the two dual optimization problems listed above. This duality interpretation can be extended further when considering the conversion formula (3) that states $\mu^{\top}\zeta = -\mathbf{y}^{\top}\mathbf{u}$. For the problem (OPP1), the edge tensions are fixed to be zero, which in turn forces the solution to its special structure in $\mathrm{span}\{\mathbb{1}\}$. The conversion formula then immediately yields that $\mathbf{y}^{\top}\mathbf{u} = 0$. Please note that the conversion formula holds in particular also for the dynamic variables. It is straight forward to see that $\boldsymbol{\mu}^{\top}(t)\boldsymbol{\zeta}(t) = -\boldsymbol{y}^{\top}(t)\boldsymbol{u}(t)$. However, the connection to the network optimization problems holds only for the asymptotic behavior of the dynamic variables.

We have analyzed the properties of the agreement steady-state solution for the dynamical network (11) under the structural condition on the control input, i.e., $\boldsymbol{u}(t) \in \mathcal{R}(E)$. While this discussion provides a clear interpretation of the potential and tension variables, as well as the divergence variables, it left some freedom in the definition of the flow variables. In fact, it is remarkable that the edge flow variables $\upmu$ in (OFP1) are neither constrained nor penalized by any cost function. Problem (OFP1) does not determine the flows uniquely, as any feasible flow $\upmu$ can be varied in $\mathcal{N}(E)$, i.e., the *circulation space* of $\mathcal{G}$, see [2], [25]. If $\mathcal{G}$ contains cycles, then there is a continuum of edge flows $\upmu$, corresponding to $\mathbf{u}$. We will call in the following all $\upmu$ which correspond to an optimal solution of (OFP1) the *feasible flows*. However, the conservation constraint $\mathbf{u} = -E\upmu$ indicates already that the flow variables are important for the computation of the steady-state control input. In fact, the flows will be determined by the *control structure*, which is chosen to regulate the network to output agreement.

B. The Control Level

We now close the loop and present a distributed control scheme that ensures the dynamical network reaches output agreement. We focus on controls in the generic structure illustrated in Figure 1 and now define the dynamical systems Π_k.

To begin, note that any static diffusive coupling, using only the current relative measurement, i.e., $\big(y_i(t)-y_j(t)\big)$, vanishes as an agreement state is reached. Consequently, for systems with different unforced equilibria, i.e., condition (12), output synchronization cannot be achieved using only static couplings. As a direct consequence of the *internal model for synchronization* [22], [32], we consider dynamic couplings and use an integrator as common internal model for the entire network with the form

$$\Pi_k: \quad \eta_k(t) := \int_{t_0}^{t} \big(y_j(\tau) - y_i(\tau)\big) d\tau, \quad \mu_k(t) = \psi_k(\eta_k(t)) \tag{17}$$

where the edge k is incident to the nodes i and j. The function $\psi_k : \mathbb{R} \mapsto \mathbb{R}$ is a coupling nonlinearity which, similar to [9], is assumed to be the gradient of some convex, differentiable function $P_k : \mathbb{R} \mapsto \mathbb{R}_{\geq 0}$, attaining a minimum at the origin, i.e.,

$$\psi_k(\eta_k(t)) := \nabla P_k(\eta_k(t)). \tag{18}$$

The control input applied to the plants is computed according to the structure of Figure 1 as

$$\boldsymbol{u}(t) = -E\boldsymbol{\mu}(t).$$

In summary, the dynamic coupling control law can be represented as

$$\begin{aligned} \dot{\boldsymbol{\eta}}(t) &= E^\top \boldsymbol{y}(t), \quad \boldsymbol{\eta}(t_0) \in \mathcal{R}(E^\top), \\ \boldsymbol{u}(t) &= -E\boldsymbol{\psi}(\boldsymbol{\eta}(t)), \end{aligned} \tag{19}$$

where $\boldsymbol{\eta}(t) = [\eta_1(t), \ldots, \eta_{|\mathbf{E}|}(t)]^\top$ is the controller state and the controller output is denoted as $\boldsymbol{\psi}(\boldsymbol{\eta}(t)) = [\psi_1(\eta_1(t)), \ldots, \psi_{|\mathbf{E}|}(\eta_{|\mathbf{E}|}(t))]^\top$. Please note that $\boldsymbol{\eta}(t) \in \mathcal{R}(E^\top)$ and $\boldsymbol{u}(t) \in \mathcal{R}(E)$ for all times. We leave here some degree of freedom on the nonlinear output functions of the controller. However, for the remainder of this section, we will restrict our attention to the following class of functions.

Assumption 4.6: The functions $P_k(\eta_k(t))$ are twice differentiable, even, and strongly convex on $\mathbb{R}$ for all $k \in \mathbf{E}$.

To start the analysis of the coupling controller (19), we first have to show that it is able to generate the steady-state control input, i.e., $\mathbf{u}$, which leads to complete output agreement. Recall that the steady-state control input leading to output agreement is the solution to (OFP1). We exploit an interpretation of the controller variables in a network theory framework to show that the internal model controller (19) can generate the correct steady-state input.

Optimal Potential Problem: We assume in the following that $\mathbf{u} = [\mathrm{u}_1, \ldots, \mathrm{u}_{|\mathbf{V}|}]^\top$ is a solution to (OFP1). Consider now the following optimization problem

$$\begin{aligned} \min_{\eta, \mathbf{v}} \quad & \sum_{i=1}^{|\mathbf{V}|} \mathrm{u}_i \mathrm{v}_i + \sum_{k=1}^{|\mathbf{E}|} P_k(\eta_k), \\ \text{s.t.} \quad & \eta = E^\top \mathbf{v}. \end{aligned} \tag{OPP2}$$

Problem (OPP2) satisfies the structure of the optimal potential problem given in (5). The variables $\mathbf{v} = [\mathrm{v}_1, \ldots, \mathrm{v}_{|\mathbf{V}|}]^\top$ are node potentials and are associated to a linear cost function. The variables $\eta = [\eta_1, \ldots, \eta_{|\mathbf{E}|}]^\top$ are tensions along the edges and are associated to the objective functions P_k, which are the integral functions of the coupling nonlinearities. The next result shows that the optimal solution to (OPP2) directly defines the steady-state value of the internal variable $\boldsymbol{\eta}(t)$ of the dynamic controller (19), which is necessary for output agreement.

Theorem 4.7: Let Assumptions 4.6 hold and let $\mathbf{u}$ be the solution to (OFP1). Then, the solution $(\mathbf{v}, \eta)$ to (OPP2) is such that $\eta \in \mathcal{R}(E^\top)$ and $\mathbf{u} = -E\psi(\eta)$.

Proof: We use the following short-hand notation $\mathbf{P}(\eta) = \sum_{k=1}^{|\mathbf{E}|} P_k(\eta_k)$. By assumption, all P_k are strongly convex functions and are globally defined. Thus, the optimization problem (OPP2) has a finite optimal solution. From the Lagrangian

$$\mathcal{L}(\eta, \mathbf{v}, \boldsymbol{\mu}) = \mathbf{P}(\eta) + \mathbf{u}^\top \mathbf{v} + \mu^\top(-\eta + E^\top \mathbf{v}), \tag{20}$$

with Lagrangian-multiplier $\mu \in \mathbb{R}^{|\mathbf{E}|}$, the optimality conditions can be derived as $\nabla \mathbf{P}(\eta) - \mu = 0$, $E^\top \mu + \mathbf{u} = 0$, and $\eta = E^\top \mathbf{v}$. From the last condition follows that any optimal η satisfies $\eta \in \mathcal{R}(E^\top)$. Furthermore, the first two conditions can be combined, providing $\mathbf{u} = -E\nabla \mathbf{P}(\eta) := -E\psi(\eta)$. ■

Please note that although (OPP2) is an optimal potential problem, it is not directly connected to the problem (OPP1), which was associated to the outputs of the dynamical system. Instead, (OPP2) is an additional optimal potential problem, which describes the steady-state behavior of the internal model controller (19). We conclude with the observation that the internal model controller (19) can, in fact, generate the desired steady-state output.

Naturally, the dual problem to the potential problem (OPP2) is again a flow problem. This dual problem is related to the output of the internal model controller, and will provide us with the missing interpretation of the network flow variables.

Optimal Flow Problem: The dual problem to (OPP2) can be derived directly from the Lagrangian (20). Standard calculations lead to the following optimal flow problem

$$\begin{aligned} \min_{\mu} \quad & \sum_{k=1}^{|\mathbf{E}|} P_k^\star(\mu_k) \\ \text{s.t.} \quad & \mathbf{u} + E\mu = 0. \end{aligned} \tag{OFP2}$$

Please note that in this problem, $\mathbf{u}$ is not a decision variable, but the solution previously defined by (OFP1). However, the problem is in compliance with the standard form of optimal flow problems (4), as one can simply introduce artificial divergence variables and add as a cost function the indicator function for the point $\mathbf{u}$.

Note that any flow μ which is feasible for (OFP2), is also a feasible flow for our first optimal flow problem (OFP1), since $\mathbf{u}$ is by assumption an optimal solution to (OFP1). We can see therefore, that the new flow problem (OFP2) selects from all feasible flows the one that minimizes the flow cost, defined by the convex conjugates of the integral functions of the coupling nonlinearities.

To complete the connection between the dynamic variables of the control systems and the network theory variables, we now formalize the connection between the optimal flow and the output of the internal model controller.

Theorem 4.8: Let Assumptions 4.6 hold, and let $\upeta$ be an optimal solution to (OPP2). Then the optimal solution $\upmu$ to (OFP2) satisfies $\upmu = \psi(\upeta)$.

Proof: We use again the short-hand notation $\mathbf{P}^\star(\upmu) = \sum_{k=1}^{|\mathbf{E}|} P_k^\star(\upmu_k)$. Consider the Lagrangian of (OFP2)

$$\mathcal{L}(\boldsymbol{\mu}, \mathbf{v}) = \mathbf{P}^\star(\upmu) + \mathbf{v}^\top(-\mathbf{u} - E\upmu)$$

with Lagrange multiplier $\mathbf{v}$. The conditions of optimality are $\nabla_\upmu \mathbf{P}^\star(\upmu) = E^\top \mathbf{v}$ and $\mathbf{u} + E\upmu = 0$. As by assumption all the functions P_k are strongly convex, their gradients are invertible, and $\nabla P_k^{-1} = \nabla P_k^\star$. Thus, the first optimality condition implies that $\upmu = \nabla \mathbf{P}(E^\top \mathbf{v})$. We can define now $\upeta = E^\top \mathbf{v}$. To complete the proof, it remains to show that $\upeta$ is an optimal solution to (OPP2). We have from the second optimality condition that $\mathbf{u} + E\nabla\mathbf{P}(\upeta) = 0$. Thus, $\upeta$ satisfies all optimality conditions of (OPP2), which proves the theorem. ■

We have now a second duality relation in the passivity-based cooperative control framework. The internal state of the controller (19), $\boldsymbol{\eta}(t)$, can be understood as a *tension*, while the output of the controller, $\boldsymbol{\mu}(t)$, can be understood as the corresponding dual *flow* variable.

We want to emphasize again that we identified network optimization problems on two different levels of the cooperative control problem. First, at the plant level, the dual problems (OPP1) and (OFP1) characterize the properties of the agreement state. The problems are fully determined by the properties of the dynamical systems (11) and the topology of the network $\mathcal{G}$. Second, another dual pair of network optimization problems, i.e., (OPP2) and (OFP2), is associated to the internal model controller (19), used to achieve output synchronization. These problems depend on the chosen control structure, i.e., the coupling nonlinearities, as well as on the solution to (OFP1). Thus, the two levels are not completely independent, but the plant level problems influence the problems on the control level.

C. The Closed-Loop Perspective

It remains to analyze the behavior of the closed-loop dynamical system. We exploit the conversion formula (3), i.e., $\upmu^\top \upzeta = -\mathbf{y}^\top \mathbf{u}$, to construct a Lyapunov function. We first note that the conversion formula also holds for the dynamic variables, i.e., $\boldsymbol{\mu}^\top(t)\boldsymbol{\zeta}(t) = -\boldsymbol{y}^\top(t)\boldsymbol{u}(t)$. The right hand side of this dynamic conversion formula is reminiscent of a supply function for passive dynamical systems. A natural question to ask in the context of this paper is what the conversion formula looks like for the supply function $(\boldsymbol{y}(t) - \mathbf{y})^\top(\boldsymbol{u}(t) - \mathbf{u})$. Exploiting the previously established connections, we make the following considerations

$$\begin{aligned}(\boldsymbol{y}(t) - \mathbf{y})^\top(\boldsymbol{u}(t) - \mathbf{u}) &= -\boldsymbol{y}^\top(t)E(\boldsymbol{\mu}(t) - \upmu) - \mathbf{y}^\top(\boldsymbol{u}(t) - \mathbf{u}) \\ &= -\boldsymbol{\zeta}^\top(t)(\boldsymbol{\mu}(t) - \upmu) - \mathbf{y}^\top(\boldsymbol{u}(t) - \mathbf{u}) \\ &= -\dot{\boldsymbol{\eta}}^\top(t)\Big(\nabla\mathbf{P}(\boldsymbol{\eta}(t)) - \nabla\mathbf{P}(\upeta)\Big) - \mathbf{y}^\top(\boldsymbol{u}(t) - \mathbf{u}).\end{aligned} \tag{21}$$

Observe that in this particular problem we have $\mathbf{y} \in \text{span}\{\mathbb{1}\}$ and $\boldsymbol{u}(t), \mathbf{u} \in \mathcal{R}(E)$. Therefore, $\mathbf{y}^\top(\boldsymbol{u}(t) - \mathbf{u}) = 0$. We conclude that

$$\Big(\nabla\mathbf{P}(\boldsymbol{\eta}(t)) - \nabla\mathbf{P}(\upeta)\Big)^\top \dot{\boldsymbol{\eta}}(t) = -(\boldsymbol{y}(t) - \mathbf{y})^\top(\boldsymbol{u}(t) - \mathbf{u}). \tag{22}$$

The last equation has the flavor of a dissipation equality. In fact, a storage function corresponding to (22) is

$$\mathbf{B}_P(\boldsymbol{\eta}(t), \upeta) = \mathbf{P}(\boldsymbol{\eta}(t)) - \mathbf{P}(\upeta) - \nabla\mathbf{P}(\upeta)^\top(\boldsymbol{\eta}(t) - \upeta). \tag{23}$$

Note that (23) is the *Bregman distance*, see [33], associated with $\mathbf{P}$ between $\boldsymbol{\eta}(t)$ and $\upeta$. The function $B_P(\boldsymbol{\eta}(t), \upeta)$ is positive definite and radially unbounded since $P(\cdot)$ is a strictly convex function. From (22) it follows now

$$\dot{\mathbf{B}}_P(\boldsymbol{\eta}(t), \upeta) = -(\boldsymbol{y}(t) - \mathbf{y})^\top(\boldsymbol{u}(t) - \mathbf{u}). \tag{24}$$

We can use these observations now for a Lyapunov analysis of the closed-loop system.

Theorem 4.9: Consider the network of dynamical systems (11), with the control inputs defined in (19). Let Assumption 4.2 and Assumption 4.6 hold. Then the network (11), (17) converges to the agreement steady-state $\mathrm{y} = \beta\mathbb{1}$, and

$$V(\boldsymbol{x}(t), \boldsymbol{\eta}(t)) = \mathbf{S}(\boldsymbol{x}(t)) + \mathbf{B}_P(\boldsymbol{\eta}(t), \upeta) \tag{25}$$

with $\mathbf{S}(\boldsymbol{x}(t)) := \sum_{i=1}^{|\mathbf{V}|} S_i(x_i(t))$ (i.e. the EIP storage functions), is a Lyapunov function for the closed-loop system.

Proof: The Lyapunov function $V(\boldsymbol{x}(t), \boldsymbol{\eta}(t))$ is positive definite since both $S_i(x_i(t))$ and $\mathbf{B}_P(\boldsymbol{\eta}(t), \upeta)$ are positive definite. By assumption, all system (11) are OSEIP and thus

$$\dot{\mathbf{S}}(\boldsymbol{x}(t)) \leq -\gamma\|\boldsymbol{y}(t) - \mathrm{y}\|^2 + (\boldsymbol{y}(t) - \mathrm{y})^\top(\boldsymbol{u}(t) - \mathrm{u}). \tag{26}$$

Thus, combining (26) and (24), we obtain the directional derivative of the Lyapunov function candidate as

$$\dot{V}(\boldsymbol{x}(t), \boldsymbol{\eta}(t)) = \dot{\mathbf{S}}(\boldsymbol{x}(t)) + \dot{\mathbf{B}}_P(\boldsymbol{\eta}(t), \upeta) \leq -\gamma\|\boldsymbol{y}(t) - \mathrm{y}\|^2. \tag{27}$$

Since $\lim_{t\to\infty} V(\mathrm{x}(t)) - V(\mathrm{x}(t_0))$ exists and is finite, and since ρ_i are positive definite, we conclude from Barbalat's lemma [28] that $\lim_{t\to\infty} \|y_i(t) - \mathrm{y}_i\| = \lim_{t\to\infty} \|y_i(t) - \beta\| \to 0$. Additionally, by the invertability of the input-to-output map follows that $\boldsymbol{u}(t)$ converges to u and, consequently, $\boldsymbol{\eta}(t)$ converges to $\upeta$. ■

We can summarize the observations of this section as follows. All signals of the dynamical network (11) and (19) have static counterparts in the network theory framework of Section II. For example, the static counterparts of the outputs $\boldsymbol{y}(t)$ are the optimal solutions y of an optimal potential problem (OPP1), defined by the equilibrium input-to-output map of the dynamical systems. Equivalently, the corresponding dual variables, i.e., divergence variables in (OFP1), u, are the static counterparts to the control inputs $\boldsymbol{u}(t)$. Additionally, the state $\boldsymbol{\eta}(t)$ and the output $\boldsymbol{\mu}(t)$ of the internal model based controller (19) have the tension and flow variables of (OPP2) and (OFP2), respectively, as their static counterparts. We visualize the connection between the dynamic variables of the closed-loop system and the static network variables in Figure 2. Note that the signals in the dynamical system influence each other in a closed-loop structure. However, there is no equivalent closed-loop relation in the connection of the network variables. In particular, the two tension variables $\upzeta$ and $\upeta$ are not connected, while their dynamic counterparts $\boldsymbol{\zeta}(t)$ and $\boldsymbol{\eta}(t)$ are connected by an integrator. Additionally, a summary of all variables involved in the output agreement problem together with their static counterparts and the defining network optimization problems is provided in Table I. For the sake of completeness, we include also the dynamic variable $\boldsymbol{v}(t)$, which corresponds to the potential variables v of (OPP2). Although we did not consider $\boldsymbol{v}(t)$ explicitly in our discussion of the dynamical network, we can define it in accordance to (OPP2) as $\boldsymbol{\eta}(t) = E\boldsymbol{v}(t)$, and obtain a complete connection between the passivity based control problem and the network optimization problems (OPP1), (OFP1), (OPP2), and (OFP2).

V. CONSTRAINED NETWORK FLOWS & DYNAMIC CLUSTERING

A major advantage of the novel interpretation presented above is that it allows us to integrate constraints into the setup. A typical limitation appearing in network flow problems are capacity constraints on the edges, and we aim here to understand the dynamic counterpart to the cooperative control problem with capacity constraints. However, before we turn our attention to the dynamic system we consider first the static versions of the network optimization problems with flow constraints and show that a combination of the two optimization problems (i.e., optimal flow and optimal potential problem) can provide important insights into the solution structure.

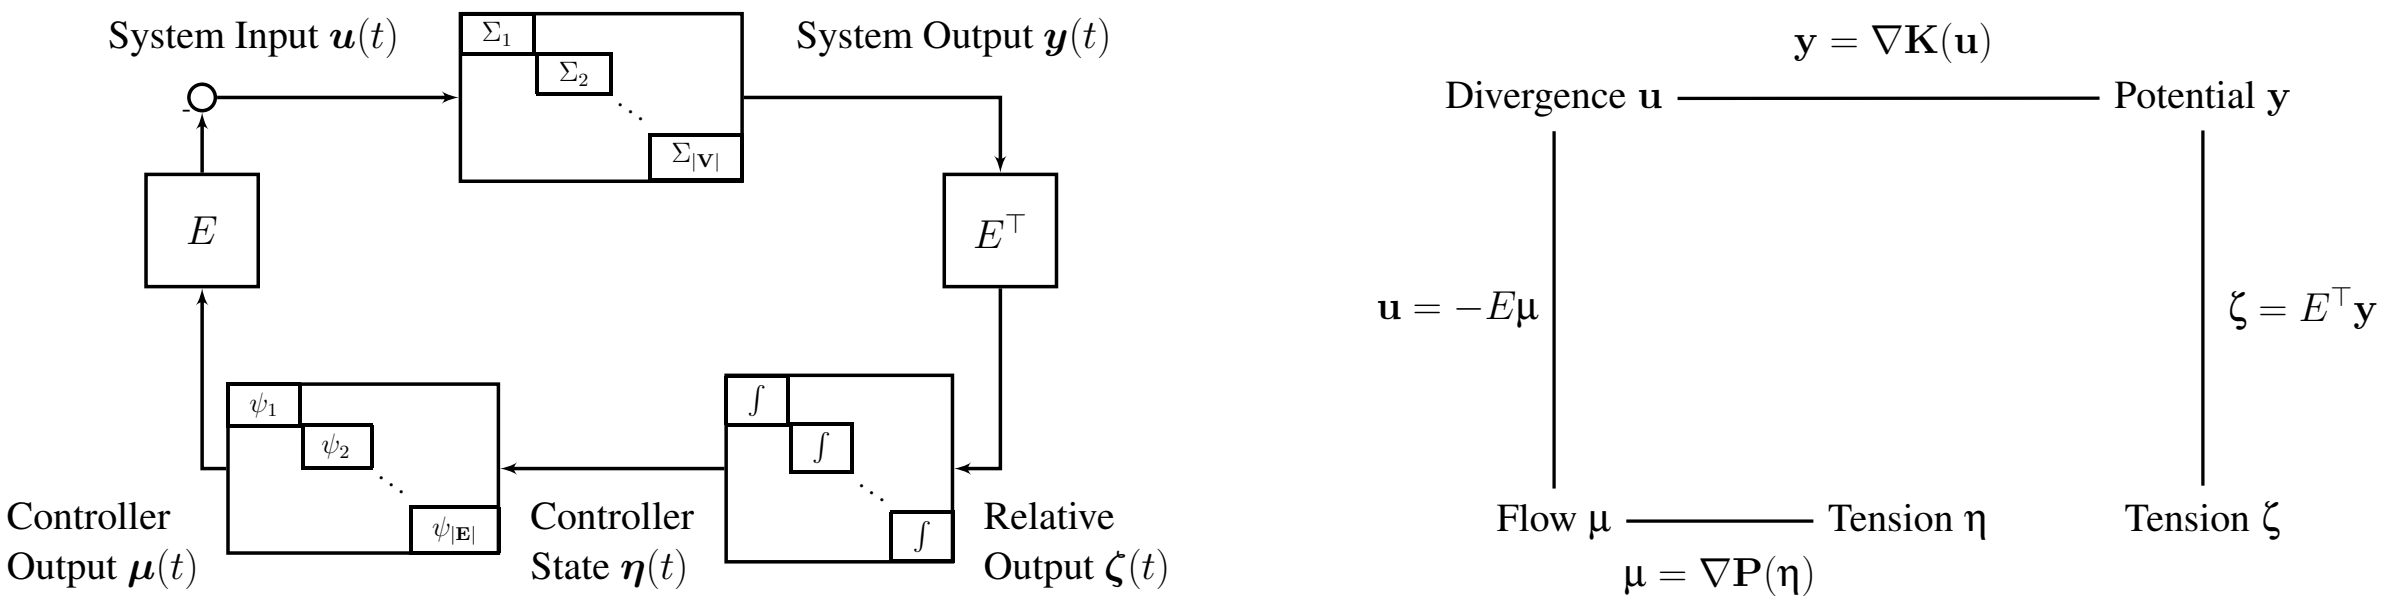
System Input $\boldsymbol{u}(t)$
Σ_1
Σ_2
$\Sigma_{|\mathbf{V}|}$
System Output $\boldsymbol{y}(t)$
E
$E^\top$
ψ_1
ψ_2
$\psi_{|\mathbf{E}|}$
$\int$
Controller Output $\boldsymbol{\mu}(t)$
Controller State $\boldsymbol{\eta}(t)$
Relative Output $\boldsymbol{\zeta}(t)$
$\mathrm{y} = \nabla \mathbf{K}(\mathrm{u})$
Divergence u
Potential y
$\mathrm{u} = -E\mu$
$\zeta = E^\top \mathrm{y}$
Flow μ
Tension η
Tension ζ
$\mu = \nabla \mathbf{P}(\eta)$

(a) Signals of the Closed-Loop Dynamical System

(b) Variables of the Network Theoretic Framework

Fig. 2. The block diagram of the closed loop system (a) and the abstracted illustration of the network variables (b). Note that the static tension variables ζ and η are not connected, while their dynamic counterparts $\boldsymbol{\zeta}(t)$ and $\boldsymbol{\eta}(t)$ are.

TABLE I

RELATION BETWEEN VARIABLES INVOLVED IN THE DYNAMICAL SYSTEM AND THEIR STATIC COUNTERPARTS.

Dynamic Signal		**Network Variable**		**Relation**	**Cost Function**	**Optimization Problem**
$\boldsymbol{y}(t)$	system output	$\mathbf{y}$	potential	$\mathbf{y} = \mathbf{k}_{\mathrm{y}}(\mathbf{u})$	$K_i^\star(\mathrm{y}_i)$	OPP1
$\boldsymbol{\zeta}(t)$	relative output	ζ	tension	$\zeta = E^\top \mathbf{y}$	$I_0(\zeta_k)$	OPP1
$\boldsymbol{u}(t)$	system input	$\mathbf{u}$	divergence	$\mathbf{u} = \mathbf{k}_{\mathrm{y}}^{-1}(\mathbf{y})$	$K_i(\mathrm{u}_i)$	OFP1
$\boldsymbol{\mu}(t)$	controller output	μ	flow	$\mathbf{u} + E\mu = 0$	$P_k^\star(\mu_k)$	OFP2
$\boldsymbol{v}(t)$	–	$\mathbf{v}$	potential	$\eta = E^\top \mathbf{v}$	$\mathrm{u}_k \mathrm{v}_k$	OPP2
$\boldsymbol{\eta}(t)$	controller state	η	tension	$\mu = \psi(\eta)$	$P_k(\eta_k)$	OPP2

A. A Primal/Dual and Saddle-Point Perspective

We assume in the following that each edge is assigned a capacity of $w_k \in \mathbb{R}_{>0}$, and we restrict the flows to be contained in the set $\mathbb{W}_k = \{\mu_k : -w_k \leq \mu_k \leq w_k\}$.

Optimal Flow Problem: Adding the flow constraints leads directly to the network flow problem

$$\begin{aligned} \min_{\mathbf{u},\mu} \quad & \sum_{i=1}^{|\mathbf{V}|} K_i(\mathrm{u}_i) \\ & \mathbf{u} + E\mu = 0 \\ & -w_k \leq \mu_k \leq w. \end{aligned} \tag{OFP3}$$

To formulate (OFP3) in the standard form (4), we can add the indicator functions $\sum_{k=1}^{|\mathbf{E}|} I_{\mathbb{W}_k}(\mu_k)$ for the constraint sets $\mathbb{W}_k$ in the cost to enforce the constraints. From this standard problem formulation, the dual problem can then be derived directly, taking into account that the convex conjugates of the indicator functions for the sets $\mathbb{W}_k$ are the weighted absolute values, i.e., $I_{\mathbb{W}_k}^\star = \sup\{\zeta\mu - I_{\mathbb{W}_k}(\mu_k)\} = w_k|\zeta_k|$.

Optimal Potential Problem: The dual to the optimal network flow problem (OFP3) is then the following *optimal potential problem*

$$\begin{aligned} \min_{\mathbf{y},\zeta} \quad & \sum_{i=1}^{|\mathbf{V}|} K_i^\star(\mathrm{y}_i) + \sum_{k=1}^{|\mathbf{E}|} w_k|\zeta_k| \\ & \zeta = E^\top \mathbf{y}. \end{aligned} \tag{OPP3}$$

Note that adding the capacity constraints allows the tensions ζ in (OPP3) to be unequal to zero.

Going directly to the dual using the convex conjugate representation seems fairly straight forward. However, performing this step directly conceals some important insights. In particular, the two optimization problems (OFP3), (OPP3) provide little insights into the structure of the optimal solution. As we might believe, after our previous discussion, that the potentials correspond to the asymptotic behavior of a cooperative dynamical network, we are interested in the structure of $\mathbf{y}$ as computed by (OPP3). Since the structure of $\mathbf{y}$ is not readily seen from (OPP3), we consider an additional representation of the network optimization problems. In fact, we consider an optimization problem which combines variables of the two primal/dual problem representations, i.e., on the one hand potential variables $\mathbf{y}$ and on the other hand flow variables μ.

Saddle-Point Problem: We consider now the following saddle-point problem

$$\max_{\mu_k} \min_{\mathrm{y}_i} \mathcal{L}(\mathbf{y}, \mu) := \sum_{i=1}^{|\mathbf{V}|} K_i^\star(\mathrm{y}_i) \ + \ \mu^\top E^\top \mathbf{y} \ - \ \sum_{k=1}^{|\mathbf{E}|} I_{\mathbb{W}_k}(\mu_k). \tag{SPP}$$

Theorem 5.1: Let $(\mathbf{y}, \mu)$ be a saddle-point solution to (SPP), then $\mathbf{y}$ is an optimal solution to (OPP3), and μ is an optimal solution to (OFP3).

Proof: From min-max theory follows directly that a saddle-point solution to (SPP) is such that $\mathbf{y}$ is a minimizer of the function $r(\mathbf{y}) = \max_\mu \mathcal{L}(\mathbf{y}, \mu)$, and μ is a maximizer of the problem function $s(\mu) = \min_{\mathbf{y}} \mathcal{L}(\mathbf{y}, \mu)$. First, note that we can introduce in (SPP) the variable $\zeta = E^\top \mathbf{y}$ and obtain $r(\mathbf{y}) = \sum_{i=1}^{|\mathbf{V}|} K_i^\star(\mathrm{y}_i) + \max_\mu \sum_{k=1}^{|\mathbf{E}|} \{\mu_k \zeta_k - I_{\mathbb{W}_k}(\mu_k)\} = \sum_{i=1}^{|\mathbf{V}|} K_i^\star(\mathrm{y}_i) + \sum_{k=1}^{|\mathbf{E}|} w_k |\zeta_k|$, which is exactly (OPP3). Alternatively, we could introduce in (SPP) the variable $\mathbf{u} = -E\mu$. We obtain then $s(\mu) = \sum_{i=1}^{|\mathbf{V}|} \min_{\mathrm{y}_k} \{K_i^\star(\mathrm{y}_i) - \mathbf{u}^\top \mathbf{y}\} - \sum_{k=1}^{|\mathbf{E}|} I_{\mathbb{W}_k}(\mu_k) = -\sum_{i=1}^{|\mathbf{V}|} K_i(\mathrm{u}_i) - \sum_{k=1}^{|\mathbf{E}|} I_{\mathbb{W}_k}(\mu_k)$. Since $\arg\max_\mu s(\mu) = \arg\min_\mu -s(\mu)$, the statement follows directly. ■

The main advantage of considering the saddle-point problem (SPP) is that it gives us insights into the structure of the solutions. In fact, the problem (SPP) allows us to connect the discussion presented here to the results of [17], [18] which showed the solution $\mathbf{y}$ to have a *clustering* structure. An intuitive explanation of this result is as follows. If two nodes are connected by an edge for which the corresponding flow satisfies the capacity constraints strictly, then the two nodes must have the same potentials. Furthermore, those edges for which the flow constraints are active partition the network. This idea is formalized in the following theorem from [17].

Theorem 5.2 ([17]): Let $(\mathbf{y}, \mu)$ be a saddle-point solution of (SPP) and let $\mathbf{Q} \subseteq \mathbf{E}$ be the set of the edge capacity constraints that are active. Then $\mathbf{Q}$ induces a partition $\mathbb{P} = \{\mathbf{P}_1, \ldots, \mathbf{P}_p\}$ of the node set and nodes within one partition attain the same potential, i.e., $\mathrm{y}_i = \mathrm{y}_j$ for all $i, j \in \mathbf{P}_l$.

Thus, the saddle-point problem explains a clustering of the node potentials in constrained network flow problems. We want to emphasize that the previous works [17], [18] studied this problem from a purely saddle-point optimization perspective, whereas in this work we consider the more general network flow interpretation of the problem.

B. The Dynamical Systems Perspective

As we are interested in the connection between the cooperative control framework of Section IV and the network flow problems (OFP3), (OPP3), we have to define a controller of the structure (19) which is in accordance to the new constraints. For this, we have to define suitable coupling nonlinearities. In this direction, we consider now a new class of flow cost functions.

Assumption 5.3: The flow cost functions $P_k^\star(\mu_k)$ are differentiable, even, convex functions on the convex set $\mathbb{W}_k = \{\mu_k : -w_k \leq \mu_k \leq w_k\}$ for some edge capacity $w_k > 0$, and

$$\lim_{|\mu_k| \to w_k} P_k^\star(\mu_k) \to \infty.$$

We can recall from our previous discussion that the flow cost functions are the convex conjugates of the integral functions P_k of the coupling nonlinearities, i.e., $\psi_k(\eta_k) = \nabla P_k(\eta_k)$. If Assumption 5.3 holds, the corresponding coupling nonlinearities $\psi_k(\cdot)$ are monotone (even co-coercive) and *bounded* functions, i.e., $\lim_{\|s\|\to\infty} \|\psi_k(s)\| \to w_k$. Thus, capacity constraints in the network flow interpretation correspond directly to bounded coupling functions in the cooperative control problem. Examples of coupling nonlinearities ψ_k that are in accordance with Assumption 5.3 are, e.g., saturation functions with saturation level w_k, i.e., $\psi_k = \mathrm{sat}_{w_k}(\eta_k)$, or $\psi_k(\eta_k) = w_k \tanh(\eta_k)$.

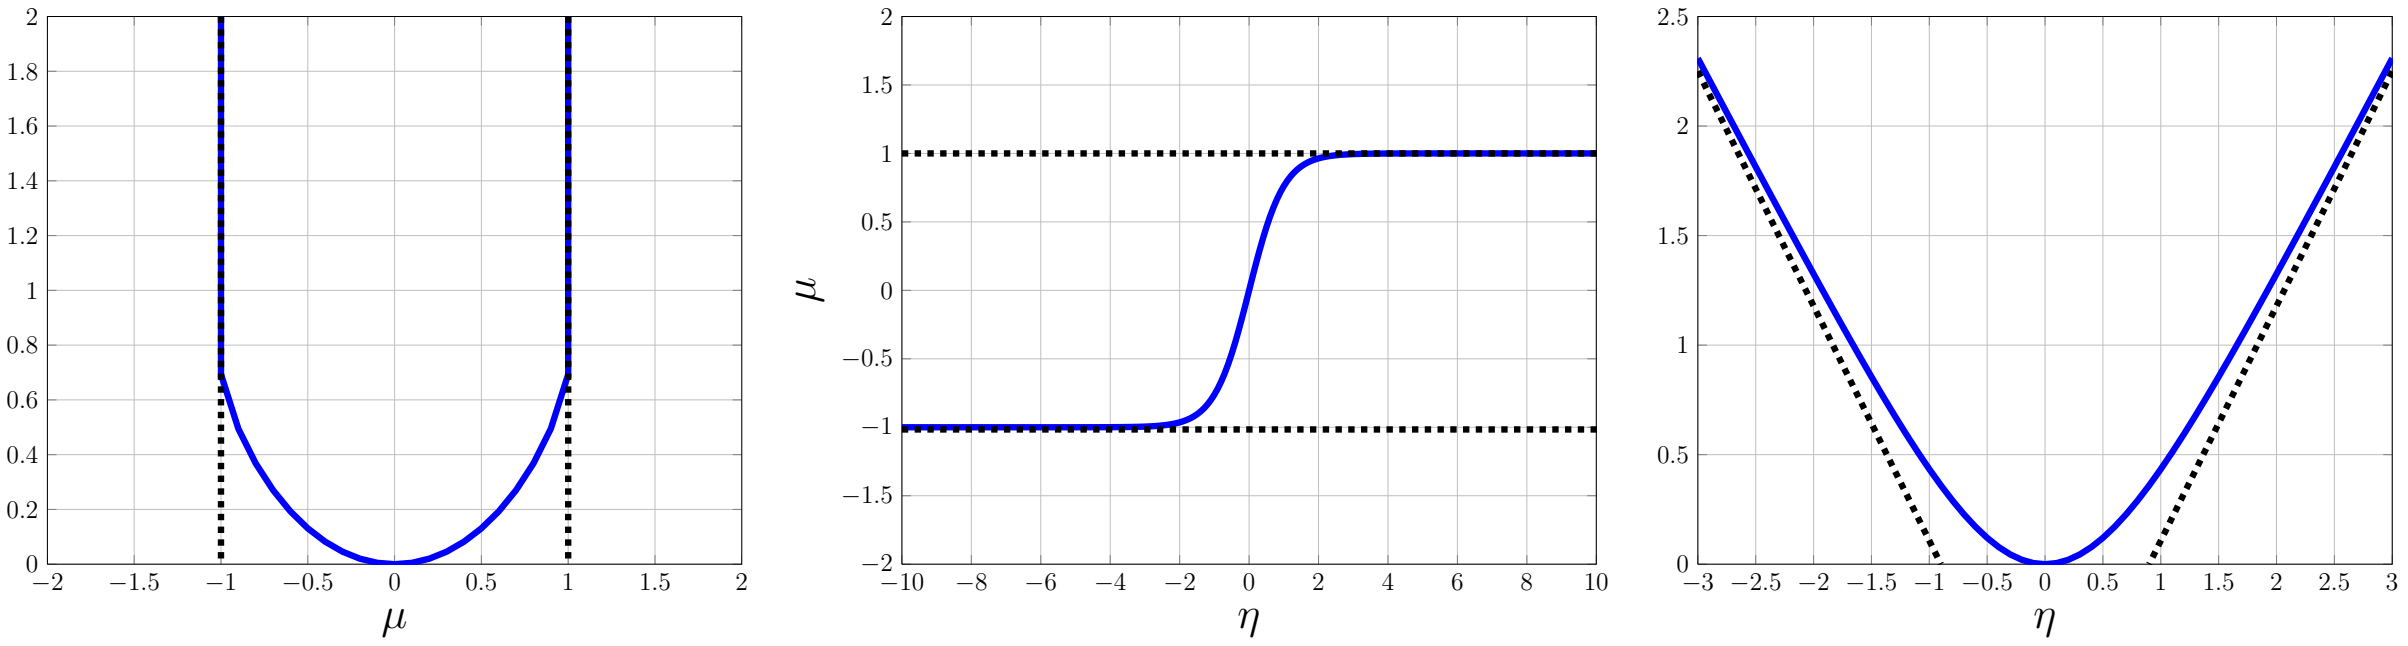

(a) $P^\star(\mu)$ (b) $\mu = \nabla P(\eta)$ $(=: \psi(\eta))$ (c) $P(\eta)$

Fig. 3. Relation between the *flow cost function* $P^\star(\mu)$, the *coupling nonlinearity*, here $\psi(\eta) = \nabla P(\eta) := \tanh(\eta)$, and the *coupling function integral* $P(\eta)$. Note that the image of the coupling nonlinearity $\psi(\eta)$, i.e., $(-1, 1)$, corresponds to the effective domain of $P^\star(\mu)$.

The new Assumption 5.3 replaces our previous Assumption 4.6, where we required the functions $P_k(\eta_k)$ to be strongly convex. In fact, the functions $P_k(\eta_k)$ now have the property that they asymptotically approach an affine function, see e.g., [2] for an explanation. Thus, they are convex, but no longer strongly convex. A graphical illustration of the flow cost function $P_k^\star(\mu_k)$, the coupling nonlinearity $\psi_k(\eta_k) = \tanh(\eta_k)$ and the convex conjugate $P_k(\eta_k)$ is provided in Figure 3. Note that if the coupling function does not reach the limit, such as $\psi_k(\eta_k) = w_k \tanh(\eta_k)$, its image is the open set $(-w_k, w_k)$.

The dynamical network counterpart to the constrained network flow problems (OFP3), (OPP3) is therefore the dynamical network (11), (19) with *bounded coupling functions*. Now, in the same way as the flow constraints caused a clustering of the node potentials in the static network optimization framework, the bounded coupling functions cause a *clustering*, or *partial output agreement*, of the dynamical network.

Definition 5.4: A network of dynamical systems is said to be *clustering*, or reaching partial output agreement, if there is a partition of the node set $\mathbb{P} = \{\mathbf{P}_1, \ldots, \mathbf{P}_p\}$, $(1 < p < |\mathbf{V}|)$, s.t.

$$\lim_{t\to\infty} y_i(t) \to \beta_l \ \text{ for all } i \in \mathbf{P}_l$$

for some $\beta_l \in \mathbb{R}$ with $\beta_l \neq \beta_q$ for $l \neq q$.

The asymptotic behavior of the dynamical network (11), (19) with *bounded* coupling functions can now be connected to the network flow problems (OFP3), (OPP3). We establish this connection using the same line of argumentation as in the previous section, but need some additional technical details. We first establish the existence of a steady-state solution.

Lemma 5.5: Let Assumptions 4.2 and 5.3 hold and let $(\mathbf{u}, \mu)$ and $(\mathbf{y}, \zeta)$ be solutions to (OFP3) and (OPP3), respectively. Then, $\mathbf{u}$ and $\mathbf{y}$ are an equilibrium input/output pair for the systems (11), i.e., $\mathbf{k}_{\mathrm{y}}(\mathbf{u}) = \mathbf{y}$.

The statement follows directly from the duality relation between (OFP3) and (OPP3), and the definition of the objective functions $K_i(\mathrm{u}_i)$. Recall, that the inputs of the dynamical network are given by $\boldsymbol{u}(t) = -E\boldsymbol{\psi}(\boldsymbol{\eta}(t))$ with $\boldsymbol{\eta}(t) \in \mathcal{R}(E^\top)$. Now, if the coupling nonlinearities approach a limit, it might not be possible to find a vector $\eta \in \mathcal{R}(E^\top)$ with only finite entries that realizes the desired equilibrium input $\mathbf{u} = -E\boldsymbol{\psi}(\eta)$. However, we show next that one can always find a trajectory such that the equilibrium input is approached asymptotically. In fact, the unboundedness of η corresponds to the clustering of the dynamical network, since we have in the dynamic counterpart $\dot{\boldsymbol{\eta}}(t) = E^\top \boldsymbol{y}(t)$, while in the steady-state $E^\top \mathbf{y} \neq 0$.

Lemma 5.6: Let $(\mathbf{u}, \upmu)$ and $(\mathbf{y}, \zeta)$ be solutions to (OFP3) and (OPP3), respectively. Then there exists a sequence $\{\upeta^\ell\}$ with $\upeta^\ell \in \mathcal{R}(E^\top)$ and $\ell \in \mathbb{Z}_+$ such that

$$\lim_{\ell \to \infty} \big(\mathbf{u} + E\nabla\psi(\upeta^\ell)\big) \to 0.$$

The proof of this result relies on the optimal potential problem (OPP2), which we previously used to determine the steady-state of the controller variable.

Proof: Consider the problem (OPP2) for some $\mathbf{u} \in \mathbb{R}^{|\mathbf{V}|}$,

$$\min_{\upeta, \mathbf{v}} \quad \sum_{k=1}^{|\mathbf{E}|} P_k(\upeta_k) + \sum_{i=1}^{|\mathbf{V}|} \mathrm{u}_i \mathrm{v}_i, \quad \text{s.t.} \quad \upeta = E^\top \mathbf{v}.$$

Replacing the divergence $\mathbf{u}$ with the corresponding flow representation $\mathbf{u} = -E\boldsymbol{\mu}$ and inserting the constraint in the objective function leads to the alternative representation of the problem as

$$\min_{\upeta} \quad \sum_{k=1}^{|\mathbf{E}|} P_k(\upeta_k) - \boldsymbol{\mu}^\top \upeta, \quad \upeta \in \mathcal{R}(E^\top). \tag{28}$$

Note that (28) has a finite optimal solution whenever $\boldsymbol{\mu}$ strictly satisfies all capacity constraints, that is $\boldsymbol{\mu} \in \operatorname{int}\Big\{\mathbb{W}_1 \times \cdots \times \mathbb{W}_{|\mathbf{E}|}\Big\}$.

Now, define a sequence $\{\upmu_\ell\}$ such that $\lim_{\ell\to\infty} \upmu^\ell \to \upmu$, while any vector $\upmu^\ell$ is such that each entry $\upmu_k^\ell$ strictly satisfies the constraints, i.e., $-w_k < \upmu_k^\ell < w_k$. Each problem has a finite optimal solution since $\upmu^\ell$ is strictly in the range of the coupling function $\nabla\mathbf{P}(\upeta) = \psi(\upeta)$. Mimicking the proof of Theorem 4.7, we can show that for each $\upmu^\ell$, the optimal solution to (28) satisfies $\mathbf{u}^\ell = -E\psi(\upeta^\ell)$, where $\mathbf{u}^\ell = -E\upmu^\ell$. From $\lim_{\ell\to\infty} \upmu^\ell \to \upmu$ follows $\lim_{\ell\to\infty} \mathbf{u}^\ell \to \mathbf{u}$, and consequently $\lim_{\ell\to\infty}(\mathbf{u} + E\nabla\psi(\upeta^\ell)) \to 0$. ■

We are now ready to connect the asymptotic behavior of the dynamical network (11), (19) with bounded coupling functions to the constrained network flow problems (OFP3), (OPP3). A natural approach to analyze these dynamics is to again consider the Lyapunov analysis of Section IV-C. An important component of the Lyapunov analysis was the use of the Bregman distance $B_P(\boldsymbol{\eta}(t), \upeta)$ as defined in (23). Unfortunately, as we discussed in Lemma 5.6, there is not necessarily a finite steady-state for the internal model controller, and consequently $\upeta$ might have unbounded components. Thus, we cannot simply consider $\mathbf{B}_P(\boldsymbol{\eta}(t), \upeta)$ as storage function. However, we can now use the sequence $\{\upeta^\ell\}$, which we constructed in the proof of Lemma 5.6, and consider

$$\bar{\mathbf{B}}_P(\boldsymbol{\eta}(t)) := \lim_{\ell\to\infty} \mathbf{B}_P(\boldsymbol{\eta}(t), \upeta^\ell) = \lim_{\ell\to\infty} \mathbf{P}(\boldsymbol{\eta}(t)) - \mathbf{P}(\upeta^\ell) - \nabla\mathbf{P}(\upeta^\ell)^\top(\boldsymbol{\eta}(t) - \upeta^\ell). \tag{29}$$

The first observation we make follows directly from Lemma 5.6, namely $\lim_{\ell\to\infty} \nabla\mathbf{P}(\upeta_\ell) = \upmu$. Next, we exploit the property that the functions $P_k(\upeta_k)$ have an affine function as an asymptote, which is a consequence of Assumption (5.3). The symmetry and the existence of an asymptote implies that $\lim_{|\upeta_k|\to\infty} P_k(\upeta_k) + \nabla P_k(\upeta_k)^\top \upeta_k = \text{const}$. Since we either have $\lim_{\ell\to\infty} \upeta_k^l$ approaches a finite value or diverges, we can conclude that

$$\lim_{\ell\to\infty} \mathbf{P}(\upeta^\ell) - \nabla\mathbf{P}(\upeta^\ell)^\top \upeta^\ell = c \tag{30}$$

for some constant c. From these observations, we can conclude that $\bar{\mathbf{B}}_P(\boldsymbol{\eta}(t)) := \mathbf{P}(\boldsymbol{\eta}(t)) - \upmu^\top \boldsymbol{\eta}(t) - c$ is a non-negative function, with minimal value zero, which is attained as $\boldsymbol{\eta}(t) \to \lim_{\ell\to\infty} \upeta^\ell$. Using the same argumentation steps as in (21), we obtain that

$$\dot{\bar{\mathbf{B}}}(\boldsymbol{\eta}(t)) = -(\boldsymbol{y}(t) - \mathbf{y})^\top(\boldsymbol{u}(t) - \mathbf{u}) - \mathbf{y}^\top(\boldsymbol{u}(t) - \mathbf{u}). \tag{31}$$

In contrast to the discussion of Section IV-C, we have now that in general $\mathbf{y} \notin \text{span}\{\mathbb{1}\}$, as the potentials might have a clustered structure. However, exploiting the duality between the potential and divergence variables, we can equivalently write $\mathbf{y}^\top(\boldsymbol{u}(t) - \mathbf{u}) = \nabla \mathbf{K}(\mathbf{u})^\top(\boldsymbol{u}(t) - \mathbf{u})$. Here, $\boldsymbol{u}(t)$ is any feasible solution to (OFP3), and $\mathbf{u}$ is an optimal solution. Thus, an optimality condition of (OFP3) is that

$$\nabla \mathbf{K}(\mathbf{u})^\top(\boldsymbol{u}(t) - \mathbf{u}) \geq 0. \tag{32}$$

We are now ready to prove the convergence of the dynamical system.

Theorem 5.7: Let Assumptions 4.2 and 5.3 hold and let $(\mathbf{u}, \upmu)$ and $(\mathbf{y}, \upzeta)$ be solutions to (OFP3) and (OPP3), respectively. Then, $\lim_{t\to\infty} \boldsymbol{y}(t) \to \mathbf{y}$ and $\lim_{t\to\infty}(-E\nabla\mathbf{P}(\boldsymbol{\eta}(t))) \to \mathbf{u}$.

Proof: Consider the nonnegative function $W(\boldsymbol{x}(t), \boldsymbol{\eta}(t)) = \mathbf{S}(\boldsymbol{x}(t)) + \bar{\mathbf{B}}_P(\boldsymbol{\eta}(t))$ with $\mathbf{S}(\boldsymbol{x}(t)) := \sum_{i=1}^{|\mathbf{V}|} S_i(x_i(t))$ the storage functions of the systems with respect to the equilibrium inputs $\mathbf{u}$. Using (8), (31), and (32), we directly obtain

$$\dot{W}(\boldsymbol{x}(t), \boldsymbol{\eta}(t)) \leq -\left(\sum_{i=1}^{|\mathbf{V}|} \rho_i(y_i - \mathrm{y}_i)\right). \tag{33}$$

Integrating both sides and applying Barbalat's Lemma [28], we finally conclude $\lim_{t\to\infty} \boldsymbol{y}(t) \to \mathbf{y}$. This can only hold if $\lim_{t\to\infty} \boldsymbol{u}(t) \to \mathbf{u}$, and thus $\lim_{t\to\infty}\big(E\nabla\mathbf{P}(\boldsymbol{\eta}(t)) + \mathbf{u}\big) \to 0$. ■

Summarizing, the clustering of diffusively coupled networks of passive dynamical systems, caused by bounded coupling nonlinearities, can be understood by studying a constrained network flow problem (OFP3). In fact, the asymptotic clustering of the dynamical systems' outputs is equivalent to the clustering of the node potentials in the problem (OPP3).

VI. APPLICATION: ANALYSIS OF A TRAFFIC DYNAMICS MODEL

The presented results have practical implications. In particular, they provide a framework to analyze cooperative dynamical networks, since network flow optimization problems can be solved efficiently using numerical methods.

We discuss here how this methodology can be used for the analysis of a traffic dynamics model. We consider in the following a microscopic traffic model, and focus on the *optimal velocity model* proposed in [34], [35]. We consider some modifications of the original model: (i) the drivers are heterogeneous and have different "preferred" velocities, (ii) the influence between cars is bi-directional, and (iii) vehicles can overtake other vehicles directly. The model is as follows. Each vehicle adjusts its velocity v_i according to the control

$$\dot{v}_i = \kappa_i[V_i(\Delta\mathbf{p}) - v_i], \tag{34}$$

where the adjustment $V_i(\Delta\mathbf{p})$ depends on the relative position to other vehicles, i.e., $\Delta\mathbf{p}$, as

$$V_i(\Delta\mathbf{p}) = V_i^0 + V_i^1 \sum_{j\in\mathcal{N}(i)} \tanh(p_j - p_i). \tag{35}$$

Here p_i denotes the position of vehicle i, and $\mathcal{N}(i)$ is used to denote the neighboring vehicles influencing vehicle i. Throughout this example, we assume that the set of neighbors to a vehicle is fixed according to the initial traffic configuration and does not change over time. The constants V_i^0 are "preferred velocities" and V_i^1 are sensitivities of the drivers. In the following we assume $V_i^0, V_i^1 > 0$ and $V_i^0 \neq V_j^0$ (heterogeneity).

We can now provide an interpretation of this traffic model in the context of network theory. The node dynamics can be directly identified as $\dot{v}_i(t) = \kappa_i[-v_i(t) + V_i^0 + V_i^1 u_i(t)]$, with $v_i(t)$ as node state and input $u_i(t) := \sum_{j\in\mathcal{N}(i)} \tanh(p_j(t) - p_i(t))$. Choosing simply the output $y_i(t) = v_i(t)$, we obtain an OSEIP system with the affine equilibrium input-output map $k_{\mathrm{y},i}(\mathrm{u}_i) = V_i^0 + V_i^1\mathrm{u}_i$. The *potential* variables are therefore the velocities of the vehicles, i.e., v_i, while the *divergence* at a node, i.e., vehicle, is the influence of the other vehicles, i.e., $\sum_{j\in\mathcal{N}(i)} \tanh(p_j - p_i)$. The objective functions, which determine the equilibrium, are here the quadratic functions

$$K_i(\mathrm{u}_i) = \frac{V_i^1}{2}\mathrm{u}_i^2 + V_i^0\mathrm{u}_i \quad \text{and} \quad K_i^\star(\mathrm{y}_i) = \frac{1}{2V_i^1}(\mathrm{y}_i - V_i^0)^2. \tag{36}$$

The state of the coupling controller can be readily identified as the relative position of the vehicles, i.e., $\boldsymbol{\eta}(t) := \Delta\mathbf{p}(t)$, while the controller output is $\mu_k(t) = \tanh(\upeta_k(t)) = \tanh(p_j(t) - p_i(t))$. This gives us also the interpretation of the *tensions* as the relative positions of the vehicles and the *flows* as their mapping through the coupling functions. The problem corresponds to a network flow problem with unity capacity constraints on the edges, i.e., $-1 \leq \upmu_k \leq 1$. With this model, the problem (OPP3) takes the form

$$\begin{aligned} \min_{\mathbf{y},\zeta} \; & \sum_{i=1}^{|\mathbf{V}|} \frac{1}{2V_i^1}(\mathrm{y}_i - V_i^0)^2 \; + \; \sum_{k=1}^{|\mathbf{E}|} |\upzeta_k| \\ & \boldsymbol{\upzeta} = E^\top \mathbf{y}. \end{aligned} \tag{37}$$

Note that this problem has a very characteristic structure, i.e., it is a quadratic problem plus an additional L_1 term penalizing the tensions $\boldsymbol{\upzeta}$. Remarkably, convex optimization problems of this structure can be solved very efficiently using modern optimization algorithms.

To complete the picture, we consider also the optimization problems associated to the controller level. The cost function on the edges for (OPP2) are the integral of the coupling functions, i.e.,

$$P_k(\upeta_k) = \ln\cosh(\upeta_k), \tag{38}$$

and the flow cost function $P_k^\star(\upmu_k)$ is the corresponding convex conjugate.

The coupling functions are here such that Assumption 5.3 is satisfied. Therefore, Theorem 5.2 holds, and we can use the static network optimization problems to analyze the asymptotic behavior of the system. In particular, the potential problem (37) has nice a convex structure and can be solved efficiently by a variety of numerical algorithms.

Since the coupling functions are saturated, the model will show for certain configurations (i.e., for certain choices of V_i^0, V_i^1) a clustering behavior. Here, clustering means that the vehicles will form groups that travel with the same velocity, while the different groups have different velocities. Such a behavior can clearly be expected in a traffic system. A computational study with 100 vehicles placed on a line graph is shown in Figure 4. The sensitivity parameter is $\kappa = 0.6$ for all vehicles, while the parameters V_i^0 and V_i^1 are chosen as a common nominal parameter plus a random component, i.e., $V_i^0 = V_{nom}^0 + V_{i,rand}^0$. The common off-set is $V_{nom}^0 = 25\frac{m}{s}$ and $V_1 = 10\frac{m}{s}$. The random component is chosen according to a zero mean normal distribution with different standard deviations. In Figure 4 (left), the time-trajectories of the velocities v_i are shown with the random coefficients $V_{i,rand}^0, V_{i,rand}^1$ chosen from a distribution with $\sigma^0 = 2.5$ and $\sigma^1 = 1$, respectively. Figure 4 (right) shows the asymptotic velocity distribution of the traffic for different choices of the standard deviation σ^0. While for $\sigma^0 = 1$ the traffic agrees on a common velocity, already for $\sigma^0 = 2.5$ a clustering structure of the network can be seen. The clustering structure becomes more refined for $\sigma^0 = 4$. We have chosen for all studies $\sigma^1 = 1$.

Please note that the novel network theoretic framework provides us with efficient tools to analyze this non-trivial dynamic behavior.

VII. CONCLUSIONS

We have established in this paper an explicit connection between passivity-based cooperative control and the general network theory framework of Rockafellar [2]. We considered a class of dynamical systems, satisfying a specific passivity property, i.e., output strictly equilibrium independent passivity, and interconnected them using a canonical network control structure. In a first step, we have shown that the purely structural constraint on the inputs, induced by the coupling structure, leads to a connection

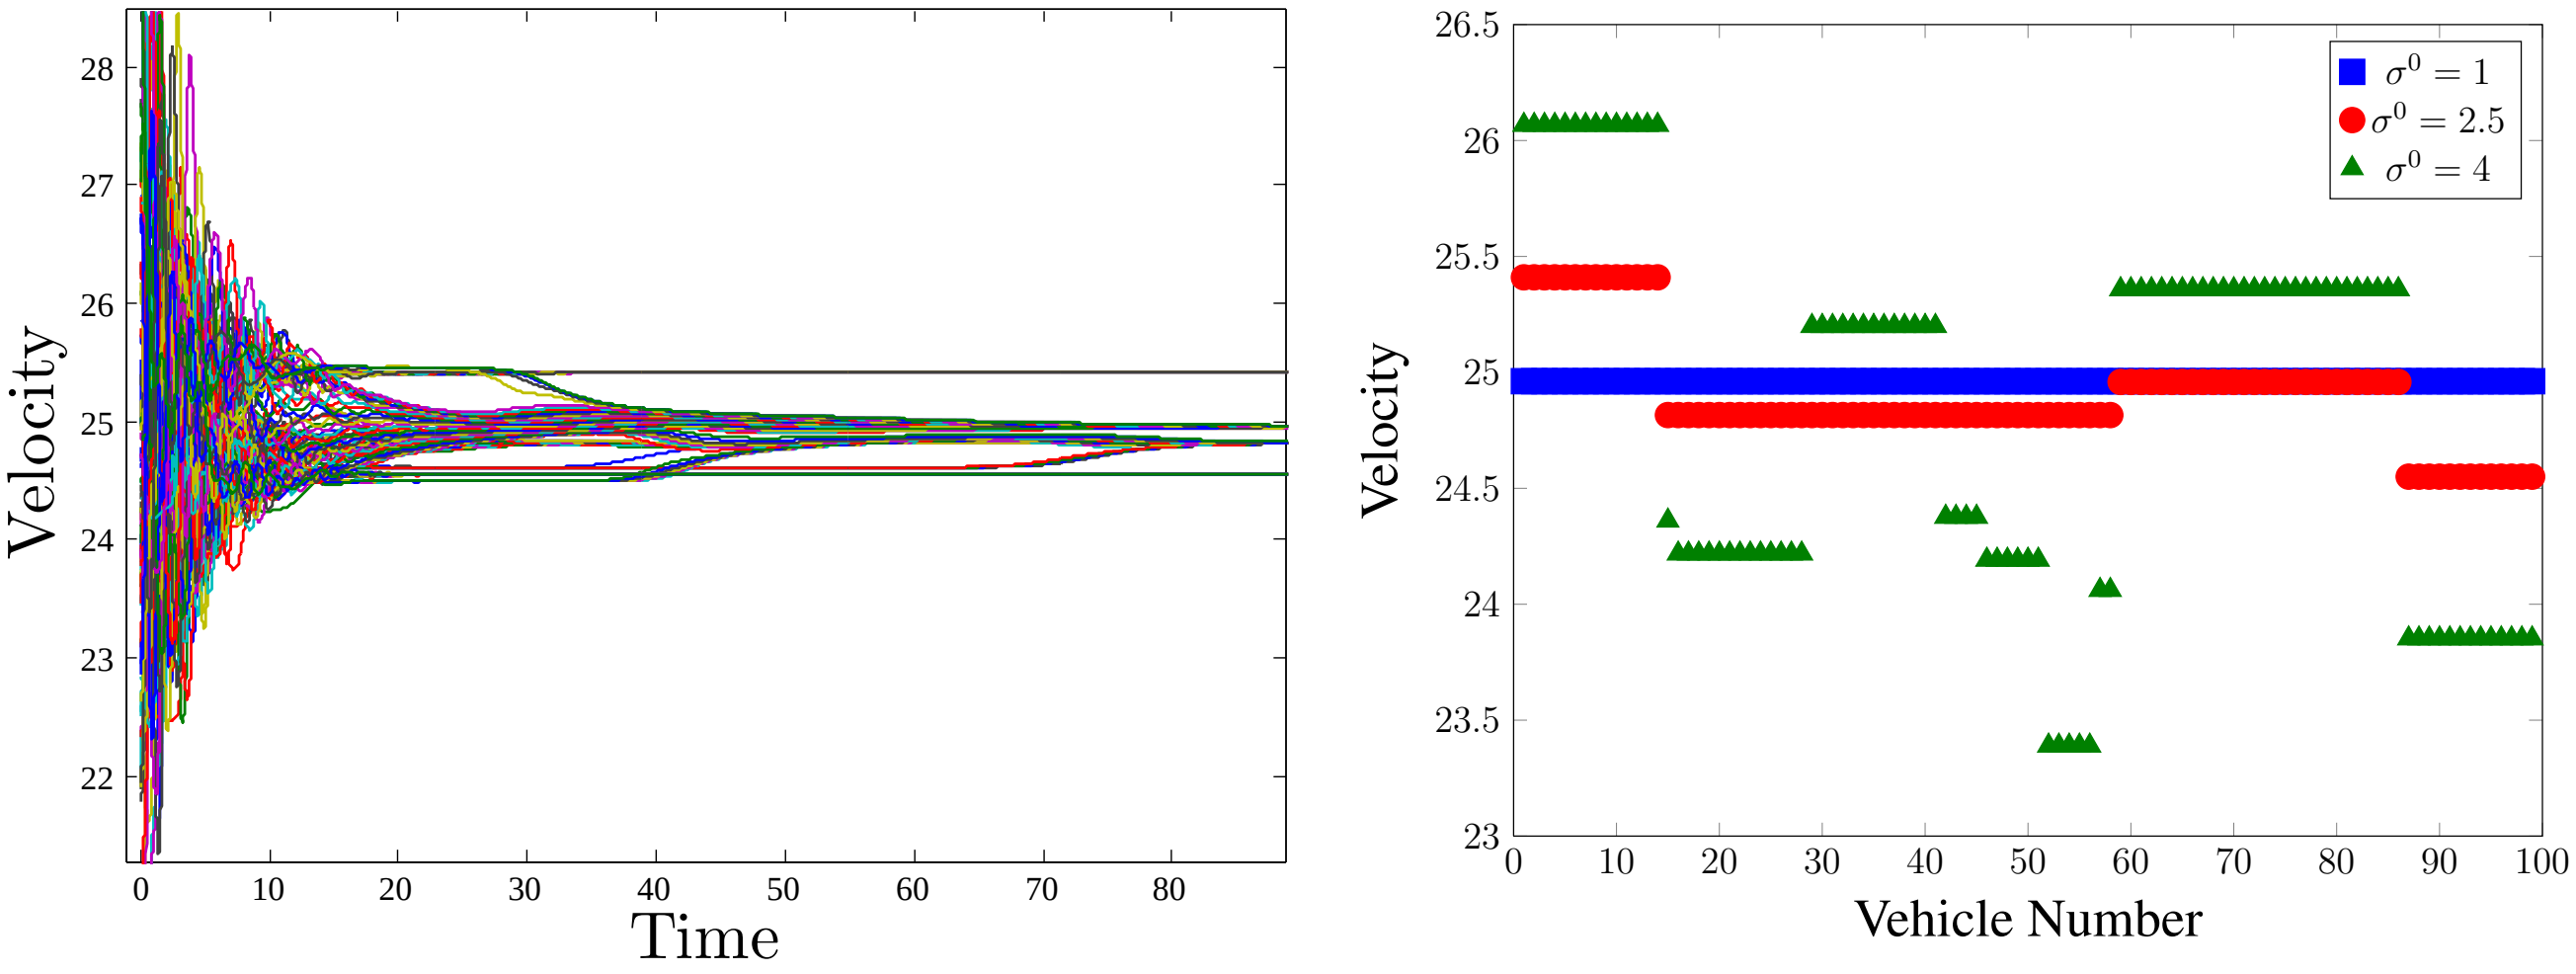

Fig. 4. Simulation results for a traffic flow model with 100 vehicles placed on a line graph. *Left:* Time trajectories of the velocities for normally distributed coefficients with $\sigma^0 = 2.5$ and $\sigma^1 = 1$. *Right:* Asymptotic velocities predicted by the network optimization problems for $\sigma^0 = 1$ (blue, '$\square$'), $\sigma^0 = 2.5$ (red, 'o'), and $\sigma^0 = 4$ (green, 'Δ').

of the dynamical systems framework with a primal/dual pair of network optimization problems. The two problems, i.e., the optimal flow and the optimal potential problem, provided us with a duality relation between the inputs, which we interpret as divergences, and the outputs, which we interpret as potentials. In a second step, we considered a particular internal-model based control structure, and connected the controller states as well as the controller outputs again to a primal/dual pair of network variables, i.e., tensions and flows. We provide in this paper for all signals in the dynamical network a static counterpart in the network theory framework of [2].

As a main advantage, this novel interpretation allows us to directly analyze more complex problem configurations. We studied in this paper the output agreement problem with *saturated couplings*. To analyze this problem, we used an alternative network optimization problem, which is in between the optimal flow and the optimal potential problem, i.e., the saddle-point problem. Studying this problem revealed that constraints on the flows lead to a *clustering* of the potential variables.

We believe that the connection established in this paper contributes to a unified understanding of networked dynamical systems and opens the way for further advanced analysis methods.

REFERENCES

[1] S. Boyd and L. Vandenberghe, *Convex Optimization*. Cambridge: Cambridge University Press, 2003.

[2] R. T. Rockafellar, *Network Flows and Monotropic Optimization*. Belmont, Massachusetts: Athena Scientific, 1998.

[3] D. P. Bertsekas, *Network Optimization: Continuous and Discrete Models*. Athena Scientific, 1998.

[4] V. Balakrishnan and L. Vandenberghe, "Connections between duality in control theory and convex optimization," in *Proc. of the American Control Conference*, 1995, pp. 4030–4034.

[5] M. Mesbahi and M. Egerstedt, *Graph Theoretic Methods in Multiagent Networks*. Princeton University Press, 2010.

[6] R. Olfati-Saber, J. A. Fax, and R. M. Murray, "Consensus and cooperation in networked multi-agent systems," *Proceedings of the IEEE*, vol. 95, no. 1, pp. 215–233, 2007.

[7] J. C. Willems, "Dissipative dynamical systems part i: General theory," *Archive for Rational Mechanics and Analysis*, vol. 45, pp. 321–351, 1972.

[8] H. Bai, M. Arcak, and J. Wen, *Cooperative control design: A systematic, passivity–based approach*. New York, NY: Springer, 2011.

[9] M. Arcak, "Passivity as a design tool for group coordination," *IEEE Transactions on Automatic Control*, vol. 52, no. 8, pp. 1380–1390, 2007.

[10] D. Zelazo and M. Mesbahi, "Edge agreement: Graph-theoretic performance bounds and passivity analysis," *IEEE Transactions on Automatic Control*, vol. 56, no. 3, pp. 544–555, 2010.

[11] N. Chopra and M. Spong, *Advances in Robot Control, From Everyday Physics to Human-Like Movements*. Springer, 2006, ch. Passivity-based Control of Multi-Agent Systems, pp. 107–134.

[12] A. Franchi, P. R. Giordano, C. Secchi, H. I. Son, and H. H. Bulthoff, "Passivity-based decentralized approach for the bilateral teleoperation of a group of uavs with switching topology," in *IEEE International Conference on Robotics and Automation*, Piscataway, NJ, USA, 2011, pp. 898–905.

[13] C. De Persis and Bay, “Coordination of passive systems under quantized measurements,” *SIAM Journal on Control and Optimization*, vol. 50, no. 6, pp. 3155 – 3177, 2012.

[14] G.-B. Stan and R. Sepulchre, “Analysis of interconnected osciallators by dissipativity theory,” *IEEE Transactions on Automatic Control*, vol. 52, no. 2, pp. 256 – 270, 2007.

[15] L. Scardovi, M. Arcak, and E. D. Sontag, “Synchronization of interconnected systems with applications to biochemical networks: An input-output approach,” *IEEE Transactions on Automatic Control*, vol. 55, no. 6, pp. 1367–1379, 2010.

[16] A. J. van der Schaft and B. M. Maschke, “Port-hamiltonian systems on graphs,” Sep. 2012, arXiv:1107.2006v2 [math.OC].

[17] M. Bürger, D. Zelazo, and F. Allgöwer, “Hierarchical clustering of dynamical networks using a saddle-point analysis,” *IEEE Transactions on Automatic Control*, vol. 58, no. 1, pp. 113 – 124, 2013.

[18] ——, “Network clustering: A dynamical systems and saddle-point perspective,” in *Proc. of IEEE Conference on Decision and Control*, Orlando, Florida, Dec. 2011, pp. 7825–7830.

[19] ——, “Combinatorial insights and robustness analysis for clustering in dynamical networks.” in *Proc. of the American Control Conference*, Montreal, 2012, pp. 454–459.

[20] G. H. Hines, M. Arcak, and A. K. Packard, “Equilibrium-independent passivity: A new definition and numerical certification,” *Automatica*, vol. 47, pp. 1949 – 1956, 2011.

[21] B. Jayawardhana, R. Ortega, E. Gracia-Canseco, and F. Castanos, “Passivity on nonlinear incremental systems: Application to PI stabilization of nonlinear RLC circuits,” *Systems and Control Letters*, vol. 56, pp. 618 – 622, 2007.

[22] P. Wieland, R. Sepulchre, and F. Allgöwer, “An internal model principle is necessary and sufficient for linear output synchronization,” *Automatica*, vol. 47, pp. 1068 – 1074, 2011.

[23] D. Zhu and P. Marcotte, “New classes of generalized monotonicity,” *Journal of Optimization Theory and Applications*, vol. 87, no. 2, pp. 457 – 471, 1995.

[24] R. Rockafellar, *Convex Analysis*. Princeton University Press, 1997.

[25] C. Godsil and G. Royle, *Algebraic Graph Theory*. Springer, 2001.

[26] G. Strang, “Duality in the classroom,” *American Math. Monthly*, vol. 91, pp. 250–254, 1984.

[27] A. Pavlov and L. Marconi, “Incremental passivity and output regulation,” *Systems and Control Letters*, vol. 57, pp. 400 – 409, 2008.

[28] H. Khalil, *Nonlinear Systems*. Upper Saddle River, New Jersey: Prentice Hall, 2002.

[29] P. DeLellis, M. di Bernardo, and G. Russo, “On QUAD, lipschitz, and contracting vector fields for consensus and synchronization of networks,” *IEEE Transactions On Circuits and Systems - I*, vol. 58, no. 3, pp. 576 – 573, 2011.

[30] T. Liu, D. Hill, and J. Zhao, “Incremental-dissipativity-based synchronization of interconnected systems,” in *Proceedings of the 18th IFAC World Congress*, Milano, Italy, 2011, pp. 8890–8895.

[31] M. Bürger, G. S. Schmidt, and F. Allgöwer, “Preference based group agreement in cooperative control,” in *Proc. of 8th IFAC Symposium on Nonlinear Control Systems (NOLCOS)*, Bologna, Italy, 2010, pp. 149 – 154.

[32] P. Wieland and F. Allgöwer, “On synchronous steady states and internal models of diffusively coupled systems,” in *Proc. 4th IFAC Symposium on System, Structure and Control*, 2010, pp. 1–10.

[33] L. Bregman, “The relaxation method of finding the common point of convex sets and its application to the solution of problems in convex programming,” *USSR Computational Mathematics and Mathematical Physics*, vol. 7, no. 3, pp. 200 – 217, 1967.

[34] M. Bando, K. Hasebe, A. Nakayama, A. Shibata, and Y. Sugiyama, “Dynamical model of traffic congestion and numerical simulation,” *Physical Review E*, vol. 51, no. 2, pp. 1035 – 1042, 1995.

[35] D. Helbing and B. Tilch, “Generalized force model of traffic dynamics,” *Physical Review E*, vol. 58, pp. 133–138, 1998.